


INSTALLATION STEPS

ATTENTION: Risk of fire and electrical shock. Fixture to be installed by qualified contractor according to local codes and ordinances. When mounting this fixture to either a gypsum or tbar ceiling it must be supported according to local codes and ordinances to accommodate the fixtures weight and should be installed with two people.

- 1** [A] - Attach non power feed aircraft grippers to ceiling or tbar grid, adjust aircraft cable height, and secure grippers by twisting safety nut clockwise.
- [B] - Canopy connections: White+, Black-, Green-, (if dimming is required): Purple Dim+, Grey Dim-
- [C] - Attach bracket bar with 1/4-20 stud and cover with canopy, securing with aircraft gripper.
- [D] - Adjust fixture height with aircraft gripper on fixture backplate. Pass excess cable through standoff hole and ensure gripper head is secured tightly.

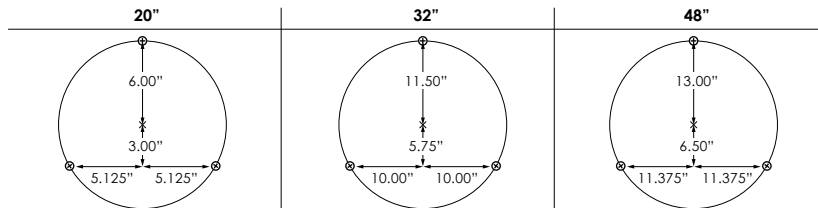

- 2** **Service | Driver Maintenance**
 [A] - Remove hex screws holding wireway compartment in place
 [B] - Remove wireway compartment to access the driver(s)
- 3** **Service | Diffuser Maintenance**
 [A] - Remove hex screws holding brackets to ring. Note if this step is performed with the fixture in place it should be performed with two people to ensure no damage to the fixture.
 [B] - Remove ring to access the diffuser.