

ORDERING CODE

ANGP1	AL1A1
MVOLT	

PROJECT INFO

TYPE

DATE

QUANTITY

PM1 Single Pendant					
NOMINAL LENGTH	ACTUAL LENGTH	SOURCE	LUMENS	INPUT WATTS	WEIGHT
12" Long	14.50"	AL1A1	2231	23w	10 lbs.
24" Long	25.94"	AL1A1	4478	44w	14 lbs.


PM2 Twin Pendant					
NOMINAL LENGTH	ACTUAL LENGTH	SOURCE	LUMENS	INPUT WATTS	WEIGHT
12" Long	14.50"	AL1A1	4462	46w	15 lbs.
24" Long	25.94"	AL1A1	8956	88w	23 lbs.

Example: ANGP1 PM1 INT 12LONG AL1A1 30K MVOLT SGW

ANGP1				AL1A1							
SERIES		MOUNT ACCESSORY		ENVIRONMENT		LENGTH		SOURCE		LED CCT	
ANGP1	Asymmetric LED Pendant Mount	PM1	Single Pendant Mount	INT	Interior Location	12LONG	12" Nominal Length	AL1A1	Asymmetric LED 1	30K	3000K CCT
		PM2	Twin Pendant Mount	WL ¹	Wet Location					35K	3500K CCT
				NT ¹	Natatorium Construction	24LONG	24" Nominal Length			40K	4000K CCT
1 Top gasketed lens assembly automatically included with WL selection.											

MVOLT							
VOLTAGE		ELECTRICAL OPTION		LENS		FINISH	
MVOLT	Multi Volt 120V thru 277V	N100	nLight Enabled Module	CA	Clear Acrylic	SGW	Semi-Gloss White
		(blank)	None	(blank)	None	SGB	Semi-Gloss Black
						ALP	Aluminum Paint (matte)

CLEAR LENS

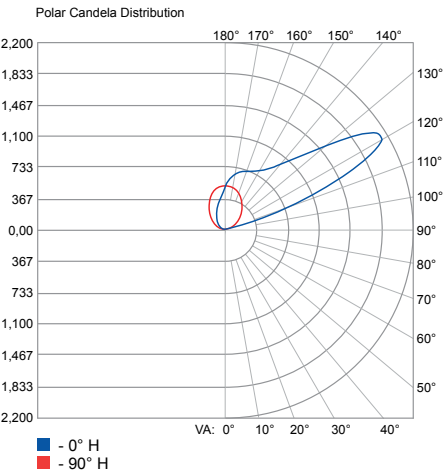


Test Report: ISF35316
IES LM 79-08
ANGP1 INT 12LONG 30K (clear lens)

Lumens: 2231
Wattage: 22W
Efficacy: 97.0
Max. Candela: 2109
CRI: 81.9

Zonal Lumen Summary		
Zone	Lumen	% Luminaire
70-100	10.8	0.5%
90-120	661.4	29.6%
90-180	2221.9	99.6%
0-180	2231	100.0%

Angle	Candlepower Distribution				
	Plane				
	0	45	90	135	180
0	2	2	2	2	2
30	0	3	5	2	0
60	0	3	5	3	1
80	0	3	5	3	1
90	0	3	5	2	0
100	6	48	21	11	5
105	70	365	49	28	21
110	721	909	81	50	42
115	1554	1287	115	73	64
120	2109	1162	150	86	83
125	1970	911	184	122	106
130	1561	750	219	149	126
135	1209	677	257	174	150
140	1013	656	293	197	175
145	886	655	332	222	198
150	808	660	372	249	221
160	734	661	447	318	287
170	670	629	497	403	376
180	519	519	519	519	519

WET LOCATION

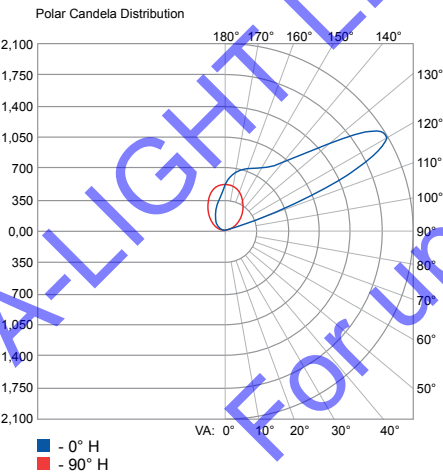

Test Report: ISF35315
IES LM 79-08
ANGP1 WL 12LONG 30K (wet location)

Lumens: 2194
Wattage: 23W
Efficacy: 95.4
Max. Candela: 2081
CRI: 81.9


Zonal Lumen Summary		
Zone	Lumen	% Luminaire
70-100	10.7	0.5%
90-120	619.8	28.3%
90-180	2185.0	99.6%
0-180	2194	100.0%

Angle	Candlepower Distribution				
	Plane				
	0	45	90	135	180
0	2	2	2	2	2
30	0	3	4	2	0
60	0	2	5	3	1
80	0	3	5	3	1
90	0	3	4	2	0
100	4	11	21	18	13
105	14	310	47	36	29
110	426	850	80	56	53
115	1530	1228	115	79	73
120	2081	1127	149	103	94
125	1943	890	184	129	115
130	1551	738	222	155	137
135	1221	674	258	180	159
140	1020	654	295	203	185
145	891	654	335	228	208
150	815	661	375	257	231
160	743	665	453	327	296
170	678	635	503	414	389
180	527	527	527	527	527


IES data is available at www.alights.com. Always refer to our website for the latest IES files updates.



PM1 Single Pendant	
NOMINAL LENGTH	L
12" Long	14.5"
24" Long	25.94"

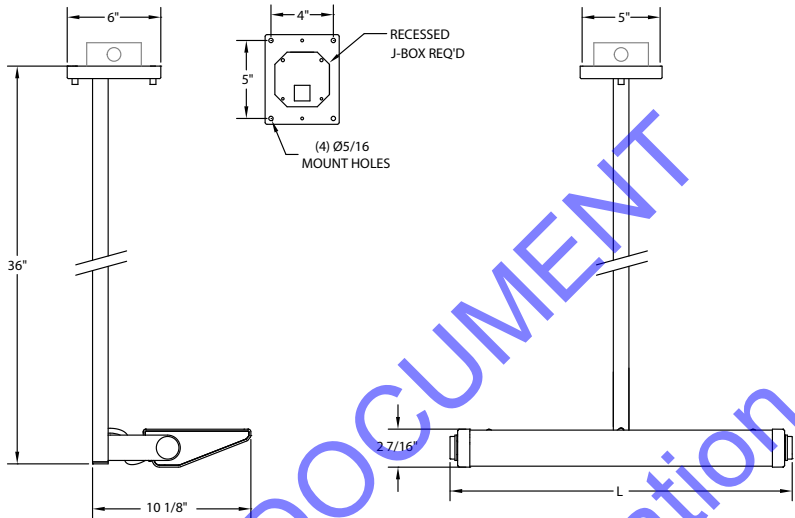

PM1 Twin Pendant	
NOMINAL LENGTH	L
12" Long	14.5"
24" Long	25.94"

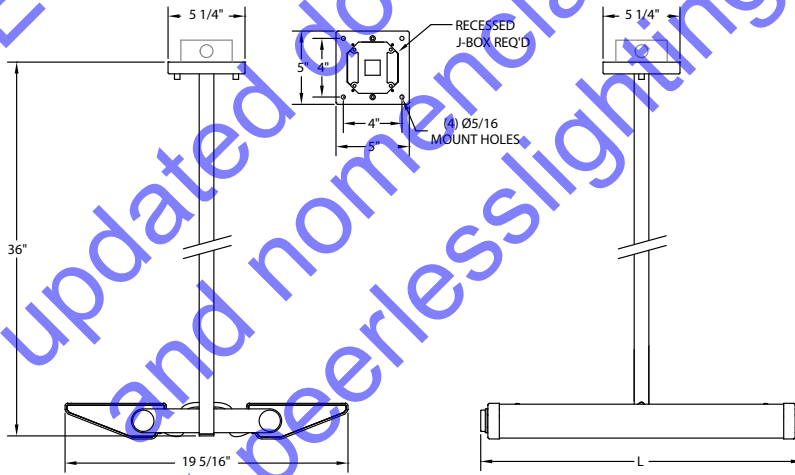

CONSTRUCTION

Extruded aluminum housing, optional clear acrylic lens, die-cast end caps with stainless steel hardware.

SOURCE

LED lumen packages provide high performance asymmetric distribution in 3000K, 3500K or 4000K color temperature options. Components are designed to be serviceable and replaceable.
L80 >60,000 hours at 25°C ambient temperature.

OPTICS

Advanced asymmetric optical system optimized for LED source and arrayed for specific lumen output and distribution.

FINISH

6 stage pre-treated polyester powder coat painted finish. All hardware is stainless steel.

ELECTRICAL

LED light engine consists of modular LED boards and 0-10V dimming driver rated for 50,000 hours at 25°C ambient temperature, wattage is dependent on luminaire output. eldoLED solodrive power supply integrally mounted. Boards and drivers are modular for replacement or service. Compatible with the following Acuity Controls: nLight nPS 80 EZ and LC&D MicroPanel.

CONTROLS

Optional intelligence allows for constant lumen management and facilitates simple networking and control via CAT-5e cable. nLight components are provided as accessories for remote field installation.

ENVIRONMENT

UL and cUL listed for interior dry or wet location use; optional natatorium construction (NT). Ambient operating temperature -20°C to 40°C.

A+ CAPABLE LUMINAIRE

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

WARRANTY

Limited defect-free, manufactured equipment warranty provided under normal use and proper storage for a period of one (1) year. LED products (LED boards and drivers) will be covered for a period of five (5) years. Wet location fixtures are not recommended for extreme wet weather conditions and must be installed according to factory drawings; there is a modified warranty for LED components installed in applications not in accordance with factory recommendations/drawings. Please refer to full terms and conditions on our website.