

PROJECT INFORMATION

Project Info

Date

Type

Quantity



Need help?
Don't see what you need?





We know that having so many options can be overwhelming. Please reach out to our factory for any specific request or questions you have. Our talented Design Assist team is here to make the process move smoothly.

ATLN

ATLN				
SERIES	DIAMETER	MOUNTING	FINISH	ACOUSTICS FINISH
ATLN	20 20" 32 32" 48 48"	S Aircraft Cable* R Wall Surface Mount F Ceiling Surface Mount P_ Rigid Stem** PV_ Swivel Stem** *Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and titanium finish and white powder coat provided for all other fixture finishes, unless otherwise specified. Not available for 48" fixtures. **Indicate stem length to nearest inch, 6.00" minimum	T Titanium W White B Black O_ Other*	Standard Colors ABF CHF TGF BGF LBF PPF AWF NBF ZFF BKF LGF SBF BBF OBF DBF DTF OAF TOF BOF PGF REF DYF PBF TPF BTF SGF GGF PNF BYF

See Acoustic color chart for reference. Premium colors require longer lead time

MOUNTING & DIMENSIONS

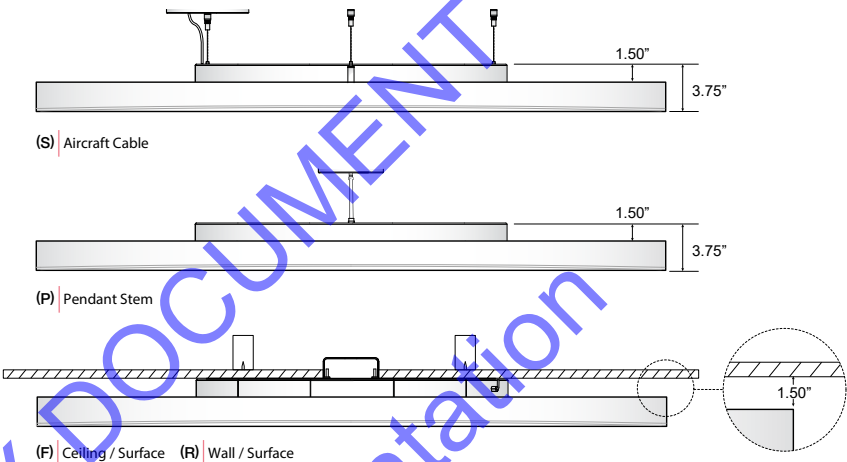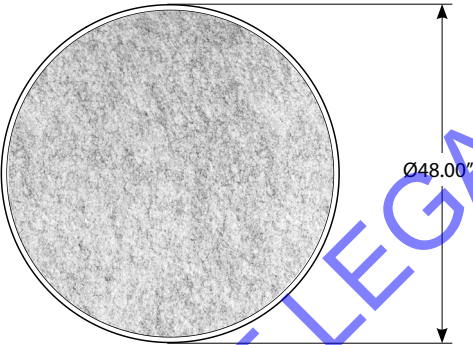

STANDARD COLORS



ABF
Azure Blue

AWF
Arctic White

BBF
Basic Black

BOF
Blood Orange

BTF
Battleship
Gray

BYF
Banana
Yellow

CHF
Charcoal



NBF
Navy Blue

OBF
Ocean Blue

PGF
Pear Green


REF
Red

SGF
Silver Gray

TGF
Titanium
Gray

ZFF
Zinfandel

PREMIUM COLORS

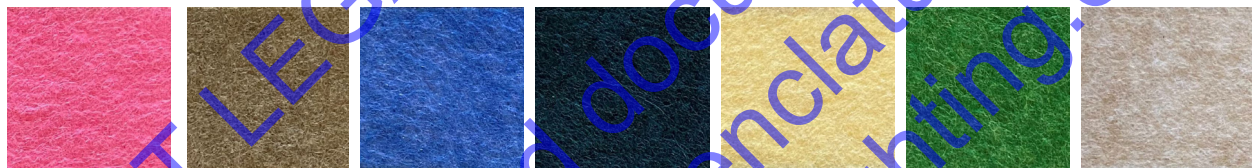

BGF
Bubble Gum

BKF
Bark Brown


DBF
Denim Blue

DTF
Deep Teal
Green

DYF
Daisy Yellow

GGF
Grass Green

LBF
Light Beige

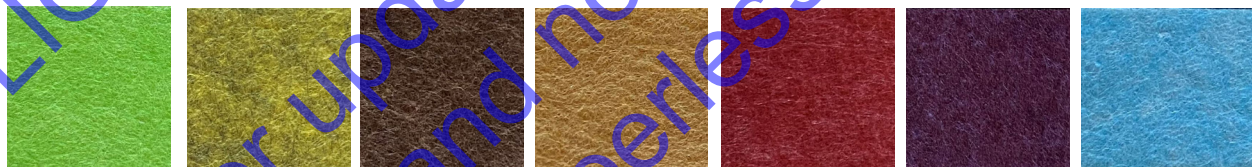

LGF
Lime Green

MGF
Moss Green

OAF
Oak Brown

PBF
Peanut Brown

PNF
Pinot Noir

PPF
Plum Purple

SBF
Sky Blue



TOF
Tangerine
Orange

TPF
Tulip Purple

DIMENSIONS

20", 32", and 48" diameter surface and suspension fixtures maintain a 2.25" profile height and 3.75" overall height including back wireway compartment making the fixture ADA compliant.

MOUNTING

Aircraft cable set includes three 48" standard length 1/16 stainless steel adjustable aircraft cables with secure micro grippers to field set suspension length, comes factory installed in fixture. 4-1/2" round canopy. IDS caddy clip and cord strain also included. Please refer to installation sheets for mounting weight requirements. Power cord options available for aircraft cable. Black power cord provided for satin black and titanium finish, white power cord provided for all other fixture finishes unless otherwise specified.

Rigid pendant stem set includes 1/2" IPS hollow threaded rod for suspension and power feed, standard specification length, 6" minimum provided with a 5" round canopy diameter.

Swivel stem set includes 1/2" IPS hollow threaded rod for suspension and power feed, standard specification length, 6" minimum, provided with a 5" round canopy diameter.

Specify if other suspension length is required. Fixture can be mounted on angles within the recommended scope, please refer to installation instruction guide for recommended angles and mounting points for optimum conditions.

Ceiling surface mount version has a galvanized mounting plate that attaches to the junction box with #8-32 screws (provided by others) and is recommended to be further affixed to the wall with additional fasteners through the slots in the mounting plate (see installation instructions). The fixture twists onto this mounting plate through a series of descending receiving flanges, and is secured in place with a spring loaded locking mechanism. This mechanism also facilitates dismounting the fixture.

Wall surface mount version has a galvanized mounting plate that attaches to the junction box with #8-32 screws (provided by others) and is recommended to be further affixed to the wall with additional fasteners through the slots in the mounting plate (see installation instructions). The fixture twists onto this mounting plate through a series of descending receiving flanges, and is secured in place with a spring loaded locking mechanism.

ACOUSTICS

The felt-like polyester panels are made from at least 40% post-consumer recycled PET bottles and are fully recyclable, no VOCs formaldehyde free. Fire tested according to ASTM E-84 Class A. The carefully studied hollow core design and the large surface area contribute to lowering the reverberation time in a set environment by absorbing sound frequencies (ideal for human voice range 250Hz to 2000Hz). Material has inherent NRC of 0.75. It is recommended to consult sound professionals for optimal spacing, positioning and quantity of acoustic material for your environment. Due to the dye process, colors may vary from batch to batch. Premium colors require longer lead time. Refer to full terms and conditions on our website.

STRUCTURE

Robust, high quality precision rolled recycled aluminum extruded housing. Laser cut and precision bent sheet metal components and brackets. Approximate fixture weight, 20"=12lbs, 32"=26lbs, 48"=55lbs.

LISTING

Tested in accordance with UL 1598 and certified to CEC/CSA C22.1, NEC, ANSI/NFPA 70, and NOM-001-SEDE. For USA and Canada. Dry & damp locations only.

WARRANTY

Limited defect-free manufactured equipment warranty provided under normal use and proper storage for a period of one (1) year.

FINISH

Electrostatically applied powder coat finish. Standard finish options include titanium, textured white and textured black. Other colors and custom finish options available, specify RAL# or contact factory regarding custom finish requirement. Colors may vary from batch to batch.