


ATLN

An elegantly slim fixture finished with subtle detailing to provide a high level of lighting performance in a simple but robust package. The ATLN is an unlit version of the Atlas fixture with PET accoustic panels at the top and bottom of the fixture, for maximum sound absorption.



ATLN				
SERIES	DIAMETER	MOUNTING	FINISH	ACOUSTICS FINISH
ATLN	20 Ø20" 32 Ø32" 48 Ø48"	S Aircraft Cable ¹ R Wall Surface Mount F Ceiling Surface Mount P Rigid Stem ² PV Swivel Stem ²	T Titanium W White B Black O Other ¹	Standard Colors ABF AWF BBF BOF BTF BYF CHF NBF OBF PGF REF SGF TGF ZFF Signature Colors BGF BKF DBF DTF DYF GGF LBF LGF MGF OAF PBF PNF PPF SBF TOF TPF
¹Black power cord provided for Black and Titanium finish and White power cord provided for all other fixture finishes, unless otherwise specified. ²Standard 48" field adjustable cable, specify length to nearest inch if over 48". ³Indicate stem length to nearest inch, 6.00" minimum. ⁴Specify RAL# or other custom color. ⁵Specify RAL#. Custom interior finish will affect light distribution, output and light color.				

Mounting & Dimensions

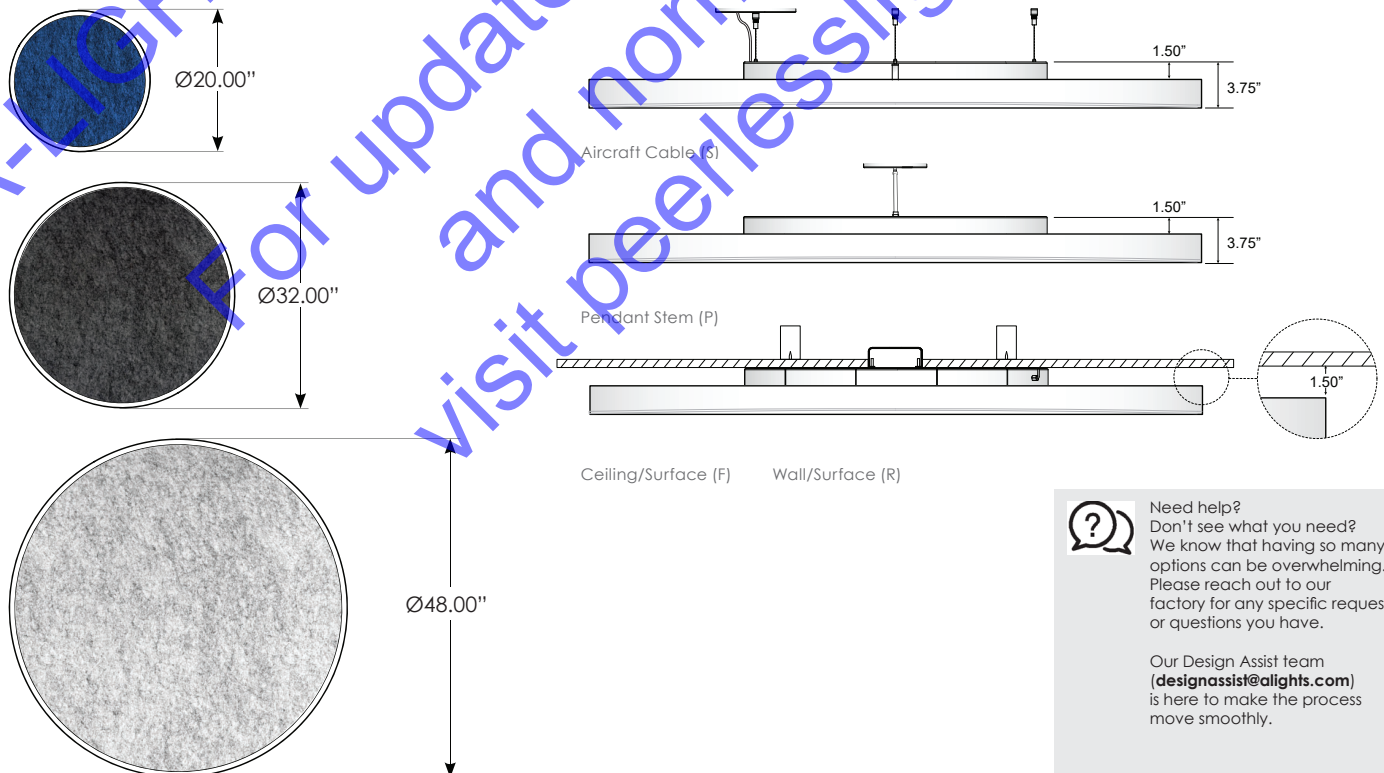

Need help?
Don't see what you need?
We know that having so many options can be overwhelming. Please reach out to our factory for any specific request or questions you have.

Our Design Assist team
(designassist@alights.com)
is here to make the process move smoothly.


Project name Type Date Quantities

Acoustic color chart

Standard colors



Signature colors

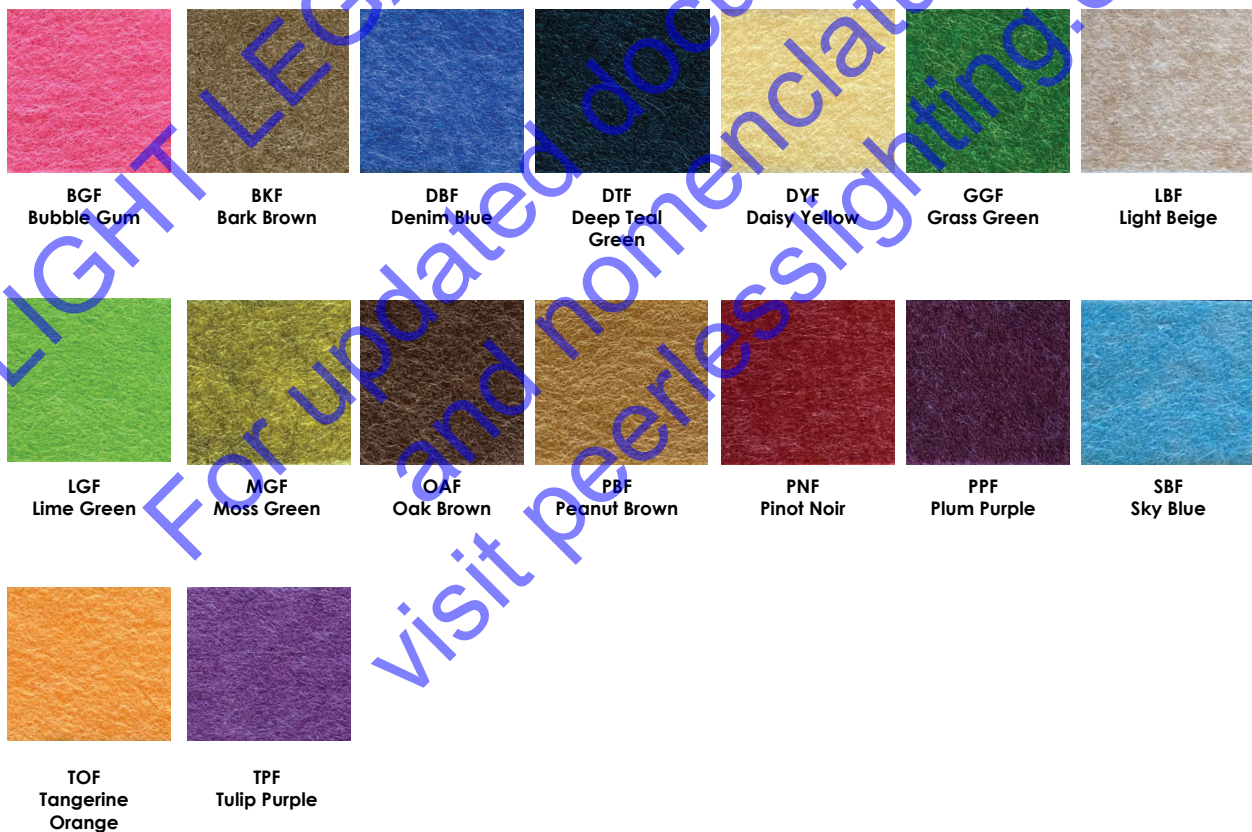

DIMENSIONS

20", 32", and 48" diameter surface and suspension fixtures maintain a 2.25" profile height and 3.75" overall height including back wireway compartment making the fixture ADA compliant.

MOUNTING

Aircraft cable set includes three 48" standard length 1/16 stainless steel adjustable aircraft cables with secure micro grippers to field set suspension length, comes factory installed in fixture. 4-1/2" round canopy. IDS caddy clip and cord strain also included. Please refer to installation sheets for mounting weight requirements. Power cord options available for aircraft cable. Black power cord provided for satin black and titanium finish, white power cord provided for all other fixture finishes unless otherwise specified.

Rigid pendant stem set includes 1/2" IPS hollow threaded rod for suspension and power feed, standard specification length, 6" minimum provided with a 5" round canopy diameter.

Swivel stem set includes 1/2" IPS hollow threaded rod for suspension and power feed, standard specification length, 6" minimum, provided with a 5" round canopy diameter.

Specify if other suspension length is required. Fixture can be mounted on angles within the recommended scope, please refer to installation instruction guide for recommended angles and mounting points for optimum conditions.

Ceiling surface mount version has a galvanized mounting plate that attaches to the junction box with #8-32 screws (provided by others) and is recommended to be further affixed to the wall with additional fasteners through the slots in the mounting plate (see installation instructions). The fixture twists onto this mounting plate through a series of descending receiving flanges, and is secured in place with a spring loaded locking mechanism. This mechanism also facilitates dismounting the fixture.

Wall surface mount version has a galvanized mounting plate that attaches to the junction box with #8-32 screws (provided by others) and is recommended to be further affixed to the wall with additional fasteners through the slots in the mounting plate (see installation instructions). The fixture twists onto this mounting plate through a series of descending receiving flanges, and is secured in place with a spring loaded locking mechanism.

ACOUSTICS

Fire tested according to ASTM E-84 Class A. The carefully studied hollow core design and the large surface area contribute to lowering the reverberation time in a set environment by absorbing sound frequencies (ideal for human voice range 250Hz to 2000Hz). Material has inherent NRC of 0.75. It is recommended to consult sound professionals for optimal spacing, positioning and quantity of acoustic material for your environment. Due to the dye process, colors may vary from batch to batch. Signature colors require longer lead time. Refer to full terms and conditions on our website.

FINISH

Electrostatically applied powder coat finish. Standard finish options include titanium, textured white and textured black. Other colors and custom finish options available, specify RAL# or contact factory regarding custom finish requirement. Colors may vary from batch to batch.

LISTING

Tested in accordance with UL 1598 and certified to CEC/CSA C22.1, NEC, ANSI/NFPA 70, and NOM-001-SEDE. For USA and Canada. Dry & damp locations only.

The ATLH is assembled in the U.S.A. and complies with the Buy America(n) Act (BAA) government procurement requirements under FAR, DFARS, and DOT.

WARRANTY

Limited defect-free manufactured equipment warranty provided under normal use and proper storage for a period of one (1) year. LED products (LED boards and drivers) will be covered for a period of five (5) years. Please refer to full terms and conditions on our website: www.alights.com/downloads/warranty/