

ORDERING CODE

**G3**

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	DISTRIBUTION	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
Very High	Symmetric	1720 lm/ft	19 W/ft	91 lm/W
	Asymmetric	725 lm/ft	9.5 W/ft	76 lm/W
High	Symmetric	864 lm/ft	9.5 W/ft	91 lm/W
	Asymmetric	725 lm/ft	9.5 W/ft	76 lm/W
Standard	Symmetric	435 lm/ft	4.75 W/ft	92 lm/W
	Asymmetric	364 lm/ft	4.75 W/ft	77 lm/W

Custom tuned output available. Please consult factory for available custom lumen output and wattage. Custom tuning available between LS and LVH for symmetric wide. Custom tuning of 25% to 125% of LH for asymmetric.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
	LVH - 200%	4000K	80+ CRI
BASELINE	LH	3500K - 97%	90+ CRI - 80%
	LS - 50%	3000K - 93%	

MOUNTING OPTIONS

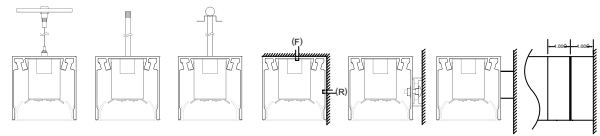

(S) | Aircraft Cable (P) | Rigid Stem (PV) | Swivel Stem (F) | Ceiling Mount (M) | Mullion Blocks (H) | Horizontal Setoff Bracket (J) | Span (R) | Direct Wall Mount (JS) | Partial Span

SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
G3	Nominal Length* Exact Length**  PL_ "L" Shape*** PU_ "U" Shape*** PR_ Rectangle / Square*** CP Custom Pattern****	LS LED Standard Output LH LED High Output LVH LED Very High Output* C_ LED Custom Output**	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	HE HE Tech™ KS Awash Kicker + WISP

\*Specify in feet to the nearest foot (i.e. 12)  
 \*\*Specify in inches to then nearest 1/8 (i.e. M180.125)  
 \*\*\*Specify in inches to the nearest 1/8 (See Pattern Guide for configurations)  
 \*\*\*\*Contact Design Assist

\*Not available with Awash Kicker + WISP optic  
 \*\*Contact Design Assist for available custom tuned output range.

MOUNTING	FINISH	DIMMING	EMERGENCY	SENSORS
S Aircraft Cable* P_ Rigid Stem** PV_ Swivel Stem** R Direct Wall Mount M_ Mullion Blocks*** H_ Horizontal Setoff Bracket**** JS Partial Span J Full Span F Ceiling / Surface Mount	T a·lightanium™ W Satin White B Satin Black O_ Other*	D Standard 0-10 dimming* D1 HiLume Ecosystems 1% (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery*	O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor

\*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a·lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified.  
 \*\*Indicate stem length to nearest inch. 1.00" minimum.  
 \*\*\*Enter "1" for 1" depth. Enter "5" for 1/2" depth

\*Specify RAL#

\*Dimming to 1% stated for standard 0-10v dimming  
 \*\*Specify model/series

\*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.

\*Wattstopper FS-205 (Ø1")  
 \*\*Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.

OPTIONS	
MRL_	2" LED Downlight Module*
M	Multi-Circuit**
R	Right Endcap Feed
L	Left Endcap Feed
N	New York City Code
K	Natorium Application***
Q	Wet Location****
CRI	90+
MRI	MRI

\*Specify required quantity, see LED Module Addendum for additional ordering details.  
 \*\*Submit multi-circuiting requirements  
 \*\*\*Not available with aircraft cable. See guide and contact Design Assist.  
 \*\*\*\*Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.