

ORDERING CODE

G4

D

PROJECT INFO

TYPE


DATE

QUANTITY

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

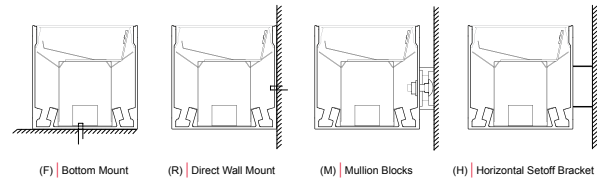

PERFORMANCE AT 4000K

OUTPUT	DISTRIBUTION	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
V. High	Symmetric Wide	1,832 lm/ft	20 W/ft	96 lm/W
High	Symmetric Wide	916 lm/ft	9.5 W/ft	96 lm/W
	Asymmetric	882 lm/ft	9.5 W/ft	93 lm/W
Standard	Symmetric Wide	461.5 lm/ft	4.75 W/ft	97 lm/W
	Asymmetric	441 lm/ft	5 W/ft	93 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	INDIRECT DISTRIBUTION
G4	_ Nominal Length* M_ Exact Length** PL_ "L" Shape*** PU_ "U" Shape*** PR_ Rectangle / Square*** CP_ Custom Pattern****	LS LED Standard Output LH LED High Output LVH LED Very High Output* C_ LED Custom Output***	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	M Symmetric Wide* N Asymmetric
<small>*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125) ***Specify in inches to the nearest 1/8 (See Pattern Guide for configurations) ****Contact Design Assist</small>		<small>*Available on "M" symmetric wide distribution only **Contact Design Assist for available custom tuned output range</small>	<small>*Not recommended with wall or mullion mounting</small>		

D	INDIRECT OPTICS	MOUNTING	FINISH	DIMMING	EMERGENCY
D	Rigid Diffuse Dust Cover	R Direct Wall Mount M_ Mullion Blocks* H_ Horizontal Setoff Bracket* F Bottom / Surface Mount	T a-lightanium™ W Satin White B Satin Black O_ Other*	D Standard 0-10 dimming* D1 Lutron Eco H series (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery*
<small>*Enter "1" for 1" depth. Enter "5" for 1/2" depth</small>		<small>*Specify RAL#</small>		<small>*Dimming to 1% stated for standard 0-10v dimming **Specify model/series</small>	<small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200mm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.</small>

SENSORS	OPTIONS
O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor	M Multi-Circuit* R Right Endcap Feed L Left Endcap Feed N New York City Code K Natatorium Application Q Wet Location** CRI 90+ MRI MRI
<small>*Wattstopper FS-205 (Ø1") **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.</small>	<small>*Submit multi-circuiting requirements **Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.</small>