

ORDERING CODE

**G5**

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	OPTIC	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
Very High	HE	1720 lm/ft	19 W/ft	91 lm/W
High	HE	864 lm/ft	9.5 W/ft	91 lm/W
	KS	725 lm/ft	9.5 W/ft	76 lm/W
Standard	HE	435 lm/ft	4.75 W/ft	92 lm/W
	KS	364 lm/ft	4.75 W/ft	77 lm/W

Custom tuned output available. Please consult factory for available custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
	LVH - 200%	4000K	80+ CRI
BASELINE	LH	3500K - 97%	90+ CRI - 80%
	LS - 50%	3000K - 93%	

MOUNTING OPTIONS

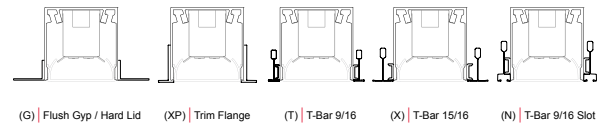

SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
G5	Nominal Length* Exact Length**  PL_ "L" Shape Flat*** PLCW_ "L" Wall to Ceiling*** PLWW_ "L" Wall to Adjacent Wall*** PU_ "U" Shape Flat*** PUCW_ "U" Wall to Ceiling to Wall*** PUWW_ "U" Wall to Wall to Wall*** PR_ Rectangle / Square*** CP Custom Pattern****	LS LED Standard Output LH LED High Output LVH LED Very High Output* C_ LED Custom Output**	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	HE HE Tech™ KS Awash Kicker + WISP
<small>*Specify in feet to the nearest foot (i.e. 12)                      **Specify in inches to then nearest 1/8 (i.e. M180.125)                      ***Specify in inches to the nearest 1/8 (See Pattern Guide for details)                      ****Contact Design Assist</small>		<small>*Not available with Awash Kicker + WISP optic                      **Contact Design Assist for available custom tuned output range</small>			

MOUNTING	FINISH*	DIMMING	EMERGENCY	SENSORS
G Flush Gyp / Mud Over Flange RG 1" Regressed Gyp / Mud Over Flange XP 1/2" Trim Flange T T-Bar 9/16" X T-Bar 15/16" N T-Bar 9/16 Slot T6 6" On Center Standard T-Bar 9/16** N6 6" On Center Slot T-Bar 9/16** <small>*Ceiling systems USG Logix™, 6" Armstrong Techzone™ or similar.                      Housing slightly regressed on N6.</small>	T a•lightanium™ W Satin White B Satin Black O_ Other**  <small>*RG, XP, T6, N4 mounting types only                      **Specify RAL#</small>	D Standard 0-10 dimming* D1 HiLume Ecosystems 1% (LDE1) D3 Other Dimming**  <small>*Dimming to 1% stated for standard 0-10v dimming                      **Specify model/series</small>	EC Emergency - circuited E_ Emergency - battery*  <small>*Factory-installed emergency battery pack:                      ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures &lt; 4' length. Not available for 347V. See technical data for more information.</small>	O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor  <small>*Wattstopper FS-205 (Ø1")                      **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.</small>

OPTIONS
MRL_ 2" LED Downlight Module* M Multi-Circuit** N New York City Code K Natatorium Application*** Q Wet Location**** CRI 90+ CRI CP Chicago Plenum MRI MRI  <small>*Specify required quantity, see LED Module Addendum for additional ordering details.                      **Submit multi-circuiting requirements                      ***See Natatorium guide and contact Design Assist.                      ****Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.</small>