

ORDERING CODE

J1
A

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
OUTPUT			
High	807 lm/ft	9.5 W/ft	85 lm/W
Standard	404 lm/ft	4.75 W/ft	85 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

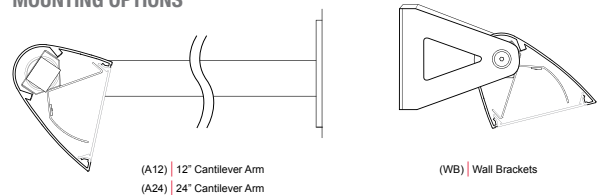

J1					A
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
J1	2 Nominal 2' 4 Nominal 4' 8 Nominal 8' R_ Nominal length 12' and over*	LS LED Standard Output LH LED High Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	A a•cirrus™
	<small>*Specify lengths in 4' increments</small>	<small>*Available from 25% to 125% of LED High Output</small>			

MOUNTING	FINISH	DIMMING	EMERGENCY	OPTIONS
A12 12" Cantilever Arms A24 24" Cantilever Arms WB Wall Brackets*	T a•lightanium™ W Satin White B Satin Black	D Standard 0-10 Dimming* D1 Lutron Eco H series (LDE1)	E1 Emergency - battery*	N New York City Code
<small>*Available only for 2' and 4' units</small>		<small>*Dimming to 1% stated for standard 0-10v dimming</small>	<small>*(1) ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V.</small>	