

ORDERING CODE

O3
S

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
OUTPUT			
High	1033 lm/ft	9.5 W/ft	109 lm/W
Standard	518.75 lm/ft	4.75 W/ft	109 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

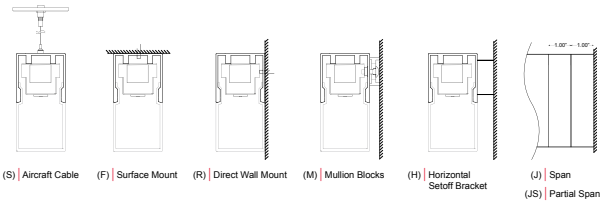

O3					S
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	OPTICS
O3	M_ Nominal Length* M_ Exact Length**	LS LED Standard Output LH LED High Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	S WISP Lens™
*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125)		*Available from 25% to 125% of LED High Output			

MOUNTING	FINISH	DIMMING	EMERGENCY	OPTIONS
S Aircraft Cable* R Direct Wall Mount M_ Mullion Blocks** H_ Horizontal Setoff Bracket** F Ceiling / Surface Mount	T a-lightanium™ W Satin White B Satin Black O_ Other*	D Standard 0-10 dimming* D1 HiLume Ecosystems 1% (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery*	M Multi-Circuit* R Right Endcap Feed L Left Endcap Feed N New York City Code CRI 90+ CRI MRI MRI
*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a-lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified. **Enter "1" for 1" depth. Enter "5" for 1/2" depth	*Specify RAL#	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.	*Submit multi-circuiting requirements