

ORDERING CODE

A4	D
A	

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
OUTPUT			
High	766 lm/ft	9.5 W/ft	81 lm/W
Standard	383 lm/ft	5 W/ft	81 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

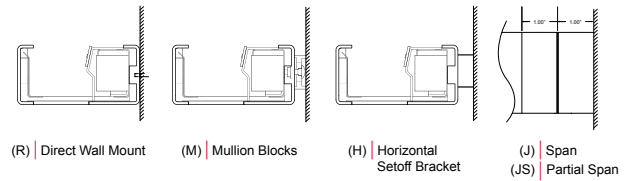

A4					D
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	INDIRECT OPTICS
A4	_ Nominal Length* M_ Exact Length**	LS LED Standard Output LH LED High Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	D Rigid Diffuse Dust Cover
<small>*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to the nearest 1/8 (i.e. M180.125)</small>		<small>*Available from 25% to 125% of LED High Output</small>			

A					
DIRECT OPTICS	MOUNTING	FINISH	CIRCUITING	DIMMING	EMERGENCY
A a·cirrus™	R Direct Wall Mount M_ Mullion Blocks* H_ Horizontal Setoff Bracket* JS Partial Span J Full Span	T a·lightanium™ W Satin White B Satin Black O_ Other*	1 Single Circuit M Other Multi-Circuit*	D Standard 0-10 dimming* D1 HiLume Ecosystems 1% (LDE1) D3_ Other Dimming**	EC Emergency - circuited E_ Emergency - battery*
	<small>*Enter "1" for 1" depth. Enter "5" for 1/2" depth.</small>	<small>*Specify RAL#</small>	<small>*Submit multi-circuiting requirements</small>	<small>*Dimming to 1% stated for standard 0-10v dimming **Specify model/series</small>	<small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.</small>

SENSORS	OPTIONS
O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor	R Right Endcap Feed L Left Endcap Feed N New York City Code CRI 90+ CRI
<small>*Wattstopper FS-205 (Ø1") **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.</small>	