

ORDERING CODE

D5

PROJECT INFO

TYPE

DATE

QUANTITY


BASELINE PERFORMANCE (80 CRI - 4000K)

OUTPUT	OPTICS	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High (LH)	HE Tech™	762 lm/ft	9.5 W/ft	80 lm/W
	WISP	754 lm/ft	9.5 W/ft	79 lm/W
	Drop Lens	692 lm/ft	9.5 W/ft	73 lm/ft
	Louvers	527 lm/ft	9.5 W/ft	55 lm/ft
Standard (LS)	HE Tech™	408 lm/ft	4.5 W/ft	90 lm/W
	WISP	403 lm/ft	4.5 W/ft	89 lm/W
	Drop Lens	370 lm/ft	4.5 W/ft	82 lm/ft
	Louvers	282 lm/ft	4.5 W/ft	62 lm/ft

LIGHT LOSS FACTORS

CRI	LED CCT	FACTOR
80+ CRI	4000K	BASELINE
80+ CRI	3500K	99%
80+ CRI	3000K	95%
90+ CRI	4000K	83%
90+ CRI	3500K	83%
90+ CRI	3000K	84%

MOUNTING OPTIONS

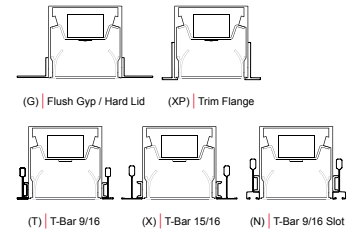

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage. *Flat Blade Louver calculated using the satin aluminum finish.

IF ALL PRODUCT NOMENCLATURE IS LISTED WITH A QS, THIS PRODUCT IS AVAILABLE IN OUR QUICK-SHIP PROGRAM

SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
D5					
D5	Nominal Length* QS Exact Length**	LS LED Standard Output QS LH LED High Output QS C_ LED Custom Output*	30 3000K QS 35 3500K QS 40 4000K QS	U Universal 120V - 277V QS 3 347V	HE HE Tech™ QS KS Awash Kicker + WISP DL 1" Drop Lens LV Flat Blade Louvers*
	PL_ "L" Shape Flat*** QS PLCW_ "L" Wall to Ceiling*** PLWW_ "L" Wall to Adjacent Wall*** PU_ "U" Shape Flat*** PUCW_ "U" Wall to Ceiling to Wall*** PUWW_ "U" Wall to Wall to Wall*** PR_ Rectangle / Square*** CP_ Custom Pattern****				
	*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125) ***Specify in inches to the nearest 1/8 (See Pattern Guide for details) ****Contact Design Assist	*Available from 25% to 125% of LED High Output			*Satin Aluminum Standard

MOUNTING	FINISH*	DIMMING	EMERGENCY
G Flush Gyp / Mud Over Flange QS RG 1" Regressed Gyp / Mud Over Flange XP 1/2" Trim Flange QS T T-Bar 9/16" QS X T-Bar 15/16" QS N T-Bar 9/16 Slot T4 4" On Center Standard T-Bar 9/16" N4 4" On Center Slot T-Bar 9/16"	T a*lightanium™ QS W Satin White QS B Satin Black O_ Other**	D Standard 0-10 dimming* QS D1 Lutron Eco H series (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery* QS
*Housing slightly regressed	*RG, XP mounting types only **Specify RAL#	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.

SENSORS	OPTIONS
O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor	MRL_ 2" LED Downlight Module* M Multi-Circuit** N New York City Code K Natatorium Application*** Q Wet Location**** CRI 90+ CRI CP Chicago Plenum MRI MRI
Wattstopper FS-205 (Ø1") **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.	*Specify required quantity, see LED Module Addendum for additional ordering details. **Submit multi-circuiting requirements *Not available with aircraft cable. See guide and contact Design Assist. Not compatible with Drop Lens or Flat Blade Louvers Optics. ****Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information. Not compatible with Drop Lens or Flat Blade Louvers Optics.

