

ORDERING CODE

D5

PROJECT INFO

TYPE

DATE

QUANTITY


BASELINE PERFORMANCE (80 CRI - 4000K)

OUTPUT	OPTICS	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High (LH)	HE Tech™	762 lm/ft	9.5 W/ft	80 lm/W
	WISP	665 lm/ft	9.5 W/ft	70 lm/W
	Drop Lens	692 lm/ft	9.5 W/ft	73 lm/W
	Louvers	527 lm/ft	9.5 W/ft	55 lm/W
Standard (LS)	HE Tech™	408 lm/ft	4.5 W/ft	90 lm/W
	WISP	333 lm/ft	4.5 W/ft	70 lm/W
	Drop Lens	370 lm/ft	4.5 W/ft	82 lm/W
	Louvers	282 lm/ft	4.5 W/ft	62 lm/W

LIGHT LOSS FACTORS

CRI	LED CCT	FACTOR
80+ CRI	4000K	BASELINE
80+ CRI	3500K	99%
80+ CRI	3000K	95%
90+ CRI	4000K	83%
90+ CRI	3500K	83%
90+ CRI	3000K	84%

MOUNTING OPTIONS

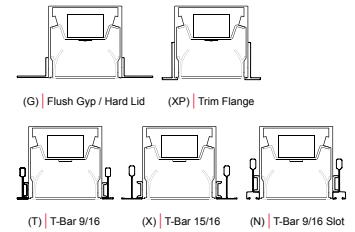

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage. *Flat Blade Louver calculated using the satin aluminum finish.

IF ALL PRODUCT NOMENCLATURE IS LISTED WITH A QS, THIS PRODUCT IS AVAILABLE IN OUR QUICK-SHIP PROGRAM

D5	SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
D5	-	Nominal Length* QS	LS LED Standard Output QS	30 3000K QS	U Universal 120V - 277V QS	HE HE Tech™ QS
	M_	Exact Length**	LH LED High Output QS	35 3500K QS	3 347V	KS Awash Kicker + WISP
	PL_	"L" Shape Flat*** QS	C_ LED Custom Output*	40 4000K QS		DL 1" Drop Lens
	PLCW_	"L" Wall to Ceiling***				LV Flat Blade Louvers*
	PLWW_	"L" Wall to Adjacent Wall***				
	PU_	"U" Shape Flat***				
	PUCW_	"U" Wall to Ceiling to Wall***				
	PUWW_	"U" Wall to Wall to Wall***				
	PR_	Rectangle / Square***				
	CP_	Custom Pattern****				

*Specify in feet to the nearest foot (i.e. 12)
 **Specify in inches to then nearest 1/8 (i.e. M180.125)
 ***Specify in inches to the nearest 1/8 (See Pattern Guide for details)
 ****Contact Design Assist

*Available from 25% to 125% of LED High Output

*Satin Aluminum Standard

MOUNTING	FINISH*	DIMMING	EMERGENCY
G Flush Gyp / Mud Over Flange QS	T a*lightanium™ QS	D Standard 0-10 dimming* QS	EC Emergency - circuited
RG 1" Regressed Gyp / Mud Over Flange QS	W Satin White QS	D1 HiLume Ecosystems 1% (LDE1)	E_ Emergency - battery* QS
XP 1/2" Trim Flange QS	B Satin Black	D3 Other Dimming**	
T T-Bar 9/16" QS	O_ Other**		
X T-Bar 15/16" QS			
N T-Bar 9/16 Slot			
T4 4" On Center Standard T-Bar 9/16"			
N4 4" On Center Slot T-Bar 9/16"			

*Housing slightly regressed

*RG, XP mounting types only
 **Specify RAL#

*Dimming to 1% stated for standard 0-10v dimming
 **Specify model/series

*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.

SENSORS	OPTIONS
O Occupancy Sensor*	MRL_ 2" LED Downlight Module*
P Photocell / Daylight Sensor**	M Multi-Circuit**
OP Occupancy & Daylight Sensor	N New York City Code
	K Natatorium Application***
	Q Wet Location****
	CRI 90+ CRI
	CP Chicago Plenum
	MRI MRI

*Specify required quantity, see LED Module Addendum for additional ordering details.
 **Submit multi-circuiting requirements
 ***Not available with aircraft cable. See guide and contact Design Assist. Not compatible with Drop Lens or Flat Blade Louvers Optics.
 ****Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information. Not compatible with Drop Lens or Flat Blade Louvers Optics.

**Wattstopper FS-205 (Ø1")
 **Wattstopper FD-301 wired for daylight harvesting.
 Requires 0-10v dimming.

