

ORDERING CODE

**D6**  
**HE**

PROJECT INFO

TYPE


DATE

QUANTITY

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

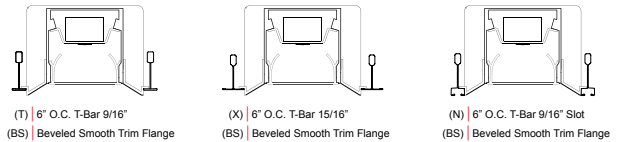

PERFORMANCE AT 4000K

	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
OUTPUT			
High	829 lm/ft	9.7 W/ft	85 lm/W
Standard	414.5 lm/ft	5 W/ft	85 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

D6					HE
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
D6	<b>_</b> Nominal Length* <b>M_</b> Exact Length**	<b>LS</b> LED Standard Output <b>LH</b> LED High Output <b>C_</b> LED Custom Output*	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>U</b> Universal 120V - 277V <b>3</b> 347V	<b>HE</b> HE Tech™
*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125)		*Available from 25% to 125% of LED High Output			

MOUNTING	TRIM FLANGE	FINISH	DIMMING	EMERGENCY
<b>T</b> 6" On Center Standard T-Bar 9/16"* <b>X</b> 6" On Center Standard T-Bar 15/16"* <b>N</b> 6" On Center Standard T-Bar 9/16 Slot*	<b>BS</b> Beveled Smooth <b>CS</b> Channel Static	<b>T</b> a•lightanium™ <b>W</b> Satin White <b>B</b> Satin Black <b>O_</b> Other*	<b>D</b> Standard 0-10 dimming* <b>D1</b> Lutron Eco H series (LDE1) <b>D3</b> Other Dimming**	<b>EC</b> Emergency - circuited <b>E_</b> Emergency - battery*
*Ceiling systems USG Logix™, 6" Armstrong Techzone™ or similar.		*Specify RAL#	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*Factory-installed emergency battery pack: iLB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.

SENSORS	OPTIONS
<b>O</b> Occupancy Sensor* <b>P</b> Photocell / Daylight Sensor**	<b>MRL_</b> 2" LED Downlight Module* <b>M</b> Multi-Circuit** <b>R</b> Right Endcap Feed <b>L</b> Left Endcap Feed <b>N</b> New York City Code <b>CRI</b> 90+ CRI <b>CP</b> Chicago Plenum <b>MRI</b> MRI
*Wattstopper FS-205 (Ø1") **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.	*Specify required quantity, see LED Module Addendum for additional ordering details. **Submit multi-circuiting requirements