

ORDERING CODE

N1	G
-----------	----------

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	DISTRIBUTION	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	Broad	1050 lm/ft	9.5 W/ft	110 lm/W
	Narrow	1085 lm/ft	9.5 W/ft	114 lm/W
Standard	Broad	527 lm/ft	4.75 W/ft	111 lm/W
	Narrow	544 lm/ft	4.75 W/ft	115 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

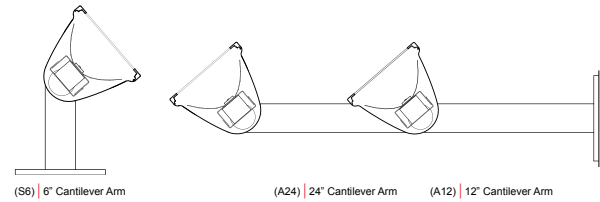

SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	DISTRIBUTION
N1	4 Nominal 4' 8 Nominal 8' R_ Nominal length 12' and over*	LS LED Standard Output LH LED High Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	B Broad N Narrow
*Specify lengths in 4' increments		*Available from 25% to 125% of LED High Output			

DIRECT OPTICS	MOUNTING	FINISH	DIMMING	EMERGENCY	OPTIONS
G Glass	A12 12" Cantilever Arms A24 24" Cantilever Arms S6 6" Ground Mount	T a·lightanium™ W Satin White B Satin Black DB Dark Bronze	D Standard 0-10 Dimming* D1 Lutron Eco H series (LDE1)	E1 Emergency - battery*	N New York City Code
			*Dimming to 1% stated for standard 0-10v dimming		
			*(1) ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V.		