

ORDERING CODE

| |
|-------------|
| ACL5 |
| HE |

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


| | NOMINAL LUMEN OUTPUT | INPUT WATTS | EFFICACY |
|-----------------|----------------------|-----------------|----------------|
| OUTPUT | | | |
| High | 921 lm/ft | 9.7 W/ft | 95 lm/W |
| Standard | 460.5 lm/ft | 5 W/ft | 95 lm/W |

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

| | OUTPUT | LED CCT | CRI |
|----------|-----------------|--------------------|----------------------|
| BASELINE | LH | 4000K | 80+ CRI |
| | LS - 50% | 3500K - 97% | 90+ CRI - 80% |
| | | 3000K - 93% | |

MOUNTING OPTIONS

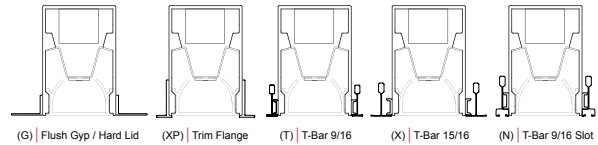

IF ALL PRODUCT NOMENCLATURE IS LISTED WITH A QS, THIS PRODUCT IS AVAILABLE IN OUR QUICK-SHIP PROGRAM

| ACL5 | | | | |
|--------|--|--|---|---|
| SERIES | LENGTH OR PATTERN TYPE | OUTPUT | LED CCT | VOLTAGE |
| ACL5 | _ Nominal Length* QS M_ Exact Length** PL_ "L" Shape*** PU_ "U" Shape*** PR_ Rectangle / Square*** CP Custom Pattern**** | LS LED Standard Output QS LH LED High Output QS C_ LED Custom Output* | 30 3000K QS 35 3500K QS 40 4000K QS | U Universal 120V - 277V QS 3 347V |

*Specify in feet to the nearest foot (i.e. 12)
 **Specify in inches to then nearest 1/8 (i.e. M180.125)
 ***Specify in inches to the nearest 1/8 (See Pattern Guide for configurations)
 ****Contact Design Assist

*Available from 25% to 125% of LED High Output

| HE | | | | |
|------------------------------|---|---|--|--|
| DIRECT OPTICS | MOUNTING | FINISH* | DIMMING | EMERGENCY |
| HE HE Tech™ QS | G Flush Gyp / Mud Over Flange QS RG 1" Regressed Gyp / Mud Over Flange QS XP 1/2" Trim Flange QS T T-Bar 9/16" QS X T-Bar 15/16" QS N T-Bar 9/16 Slot QS | T a*lightanium™ QS W Satin White QS B Satin Black O_ Other** | D Standard 0-10 dimming* QS D1 Lutron Eco H series (LDE1) D3 Other Dimming** | EC Emergency - circuited E_ Emergency - battery QS |

*Only on RG and XP mounting types
 **Specify RAL#

*Dimming to 1% stated for standard 0-10v dimming
 **Specify model/series

*Factory-installed emergency battery pack: ILB-SL-CP12 (1200m for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.

| SENSORS | OPTIONS |
|---|---|
| O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor | M Multi-Circuit* N New York City Code K Natatorium Application** Q Wet Location*** CRI 90+ CRI CP Chicago Plenum MRI MRI |

*Submit multi-circuiting requirements
 **Not available with aircraft cable. See guide and contact Design Assist
 ***Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.

*Wattstopper FS-205 (Ø1")
 **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.