

ORDERING CODE

**ACL5**

PROJECT INFO

TYPE

DATE

QUANTITY


BASELINE PERFORMANCE (80 CRI - 4000K)

OUTPUT	OPTICS	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High (LH)	HE Tech™	926 lm/ft	9.5 W/ft	98 lm/W
	Drop Lens	756 lm/ft	9.5 W/ft	80 lm/W
	Flat Blade Louver*	655 lm/ft	9.5 W/ft	69 lm/W
Standard (LS)	HE Tech™	495 lm/ft	4.5 W/ft	109 lm/W
	Drop Lens	404 lm/ft	4.5 W/ft	89 lm/W
	Flat Blade Louver*	350 lm/ft	4.5 W/ft	77 lm/W

LIGHT LOSS FACTORS

CRI	LED CCT	FACTOR
80+ CRI	4000K	BASELINE
80+ CRI	3500K	99%
80+ CRI	3000K	95%
90+ CRI	4000K	83%
90+ CRI	3500K	83%
90+ CRI	3000K	84%

MOUNTING OPTIONS

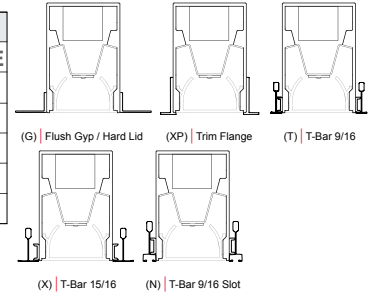

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage. \*Flat Blade Louver calculated using the satin aluminum finish.

IF ALL PRODUCT NOMENCLATURE IS LISTED WITH A QS, THIS PRODUCT IS AVAILABLE IN OUR QUICK-SHIP PROGRAM

ACL5	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE
ACL5	_ Nominal Length* QS _ Exact Length**  PL_ "L" Shape*** QS PU_ "U" Shape*** PR_ Rectangle / Square*** CP_ Custom Pattern****	LS LED Standard Output QS LH LED High Output QS C_ LED Custom Output*	30 3000K QS 35 3500K QS 40 4000K QS	U Universal 120V - 277V QS 3 347V

\*Specify in feet to the nearest foot (i.e. 12)  
 \*\*Specify in inches to then nearest 1/8 (i.e. M180.125)  
 \*\*\*Specify in inches to the nearest 1/8 (See Pattern Guide for configurations)  
 \*\*\*\*Contact Design Assist

\*Available from 25% to 125% of LED High Output

DIRECT OPTICS	MOUNTING	FINISH*	DIMMING	EMERGENCY
HE HE Tech™ QS DL 1" Drop Lens LV Flat Blade Louvers*	G Flush Gyp / Mud Over Flange QS RG 1" Regressed Gyp / Mud Over Flange XP 1/2" Trim Flange QS T T-Bar 9/16" QS X T-Bar 15/16" QS N T-Bar 9/16 Slot	T a•lightanium™ QS W Satin White QS B Satin Black O_ Other**	D Standard 0-10 dimming* QS D1 HiLume Ecosystems 1% (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery QS

\*Satin Aluminum Standard

\*Only on RG and XP mounting types  
 \*\*Specify RAL#

\*Dimming to 1% stated for standard 0-10v dimming  
 \*\*Specify model/series

\*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.

SENSORS	OPTIONS
O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor	M Multi-Circuit* N New York City Code K Natatorium Application** Q Wet Location*** CRI 90+ CRI CP Chicago Plenum MRI MRI

\*Wattstopper FS-205 (Ø1")  
 \*\*Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.

\*Submitt multi-circuiting requirements  
 \*\*Not available with aircraft cable. See guide and contact Design Assist. Not compatible with Drop Lens or Flat Blade Louvers Optics.  
 \*\*\*Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information. Not compatible with Drop Lens or Flat Blade Louvers Optics.