

ORDERING CODE

ACL7
TF

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
OUTPUT			
High	413 lm/ft	9.6 W/ft	43 lm/W
Standard	206.5 lm/ft	5 W/ft	43 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

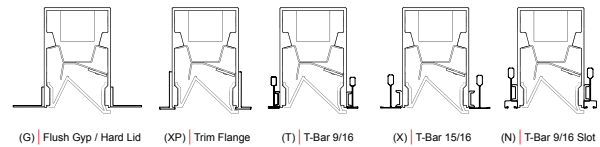

ACL7					TF
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	DIRECT ASYMMETRIC OPTICS
ACL7	_ Nominal Length* M_ Exact Length*	LS LED Standard Output LH LED High Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	TF Tri-Formed Self-Shielding Lens
<small>*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125)</small>		<small>*Available from 25% to 125% of LED High Output</small>			

MOUNTING	FINISH	DIMMING	EMERGENCY	OPTIONS
G Flush Gyp / Mud Over Flange XP 1/2" Trim Flange T T-Bar 9/16" X T-Bar 15/16" N T-Bar 9/16 Slot	T a•lightanium™ W Satin White B Satin Black O_ Other*	D Standard 0-10 dimming D1 HiLume Ecosystems 1% (LDE1) D3 Other Dimming <small>Specify model/series</small>	EC Emergency - circuited E_ Emergency - battery*	M Multi-Circuit* N New York City Code Q Wet Location** CRI 90+ CRI CP Chicago Plenum
	<small>*Specify RAL#</small>	<small>**Dimming to 1% stated for standard 0-10v dimming ***Specify model/series</small>	<small>*Factory-installed emergency battery pack: iLB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.</small>	<small>*Submit multi-circuiting requirements **Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.</small>