

ORDERING CODE

ATM2 +

G **D** **HE**

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	LENS	NOMINAL LUMEN OUTPUT		INPUT WATTS	EFFICACY
		INDIRECT	DIRECT		
High	Dust Cover	865 lm/ft	N/A	9.6 W/ft	90 lm/W
	HE Tech	N/A	826 lm/ft	9.5 W/ft	95 lm/W
Standard	Dust Cover	432.5 lm/ft	N/A	5 W/ft	90 lm/W
	HE Tech	N/A	413 lm/ft	5 W/ft	95 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASILINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

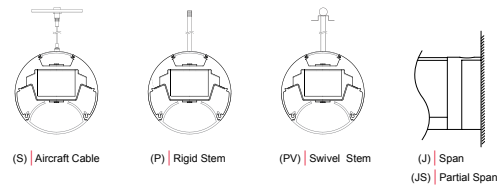

ATM2		+		G	
SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	INDIRECT DISTRIBUTION
ATM2	_ Nominal Length* M_ Exact Length** PL_ "L" Shape*** PU_ "U" Shape*** PR_ Rectangle / Square*** CP_ Custom Pattern****	ILS Indirect LED Standard Output ILH Indirect LED High Output IC_ Indirect LED Custom Output* + DLS Direct LED Standard Output DLH Direct LED High Output DC_ Direct LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	G Symmetric Narrow
<small>*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125) ***Specify in inches to the nearest 1/8 (See Pattern Guide for details) ****Contact Design Assist</small>		<small>*Available from 25% to 125% of LED High Output</small>			

D	HE			
INDIRECT OPTICS	DIRECT OPTICS	MOUNTING	FINISH	CIRCUITING
D Rigid Diffuse Dust Cover	HE HE Tech™	S Aircraft Cable* P_ Rigid Stem** PV_ Swivel Stem** JS Partial Span J Full Span	T a-lightanium™ W Satin White B Satin Black O_ Other*	1 Single Circuit 2 Multi-Circuit* M Other Multi-Circuit**
		<small>*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a-lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified. **Indicate stem length to nearest inch, 1.00" minimum.</small>	<small>*Specify RAL#</small>	<small>*Separate uplight and downlight circuits **Submit multi-circuiting requirements</small>

DIMMING	EMERGENCY	OPTIONS
D Standard 0-10 dimming* D1 Lutron Eco H series (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery*	N New York City Code CRI 90+
<small>*Dimming to 1% stated for standard 0-10v dimming **Specify model/series</small>	<small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.</small>	