

ORDERING CODE

<b>ACL8</b>
<b>TF</b>

PROJECT INFO

DATE

TYPE

QUANTITY

PERFORMANCE AT 4000K


	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
OUTPUT			
<b>High</b>	<b>413 lm/ft</b>	<b>9.6 W/ft</b>	<b>43 lm/W</b>
<b>Standard</b>	<b>206.5 lm/ft</b>	<b>5 W/ft</b>	<b>43 lm/W</b>

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	<b>LH</b>	<b>4000K</b>	<b>80+ CRI</b>
	<b>LS - 50%</b>	<b>3500K - 97%</b>	<b>90+ CRI - 80%</b>
		<b>3000K - 93%</b>	

MOUNTING OPTIONS

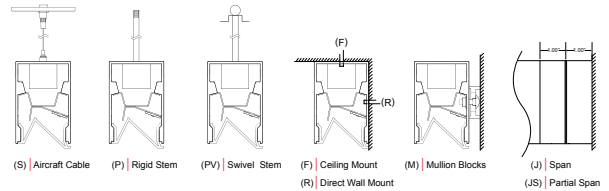

ACL8					TF
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	DIRECT ASYMMETRIC OPTICS
ACL8	<b>_</b> Nominal Length* <b>M_</b> Exact Length**	<b>LS</b> LED Standard Output <b>LH</b> LED High Output <b>C_</b> LED Custom Output*	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>U</b> Universal 120V - 277V <b>3</b> 347V	<b>TF</b> Tri-Formed Self-Shielding Lens
*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125)		*Available from 25% to 125% of LED High Output			

MOUNTING	FINISH	DIMMING	EMERGENCY	OPTIONS
<b>S</b> Aircraft Cable* <b>P_</b> Rigid Stem** <b>PV_</b> Swivel Stem** <b>R</b> Direct Wall Mount <b>M_</b> Mullion Blocks*** <b>F</b> Ceiling Mount <b>JS</b> Partial Span <b>J</b> Full Span	<b>T</b> a•lightanium™ <b>W</b> Satin White <b>B</b> Satin Black <b>O_</b> Other*	<b>D</b> Standard 0-10 dimming* <b>D1</b> Lutron Eco H series (LDE1) <b>D3</b> Other Dimming**	<b>EC</b> Emergency - circuited <b>E_</b> Emergency - battery*	<b>M</b> Multi-Circuit* <b>R</b> Right Endcap Feed <b>L</b> Left Endcap Feed <b>N</b> New York City Code <b>Q</b> Wet Location** <b>CRI</b> 90+ CRI
*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a•lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified. **Indicate stem length to nearest inch. 1.00" minimum. ***Enter "1" for 1" depth. Enter "5" for 1/2" depth	*Specify RAL#	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.	*Submit multi-circuiting requirements **Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.