

ORDERING CODE

**ACL9**

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	LENS	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	HE Tech	921 lm/ft	9.7 W/ft	95 lm/W
Standard	HE Tech	460.5 lm/ft	5 W/ft	95 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASILINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

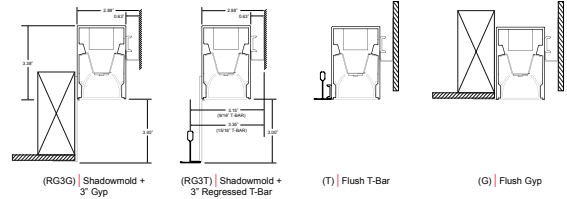

ACL9	SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
ACL9	M_	Exact Length*	LS LED Standard Output LH LED High Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	HE HE Tech™ LV Flat Blade Louvers**
	PL_	"L" Shape**				
	PU_	"U" Shape**				
	PR_	Rectangle / Square**				
	CP_	Custom Pattern***				
		*Specify in inches to then nearest 1/8 (i.e. M180.125) **Specify in inches to the nearest 1/8 (See Pattern Guide for details) ***Contact Design Assist	*Available from 25% to 125% of LED High Output			*Recommended **Satin Aluminum Standard

MOUNTING	FINISH	DIMMING	EMERGENCY
G Flush Gyp T Flush T-Bar RG3G Shadowmold + 3" Regressed Gyp* RG3T Shadowmold + 3" Regressed T-Bar*	T a•lightanium™ W Satin White B Satin Black O_ Other	D Standard 0-10 dimming* D1 HiLume Ecosystems 1% (LDE1) D3 Other Dimming	EC Emergency - circuited E_ Emergency - battery*
*Optional finish	*Specify RAL#	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.

OPTIONS
M Multi-Circuit* R Right Endcap Feed L Left Endcap Feed N New York City Code Q Wet Location** CP Chicago Plenum CRI 90+ CRI
*Submit multi-circuiting requirements **Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.