

ORDERING CODE

**D9**

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
OUTPUT			
<b>High</b>	<b>829 lm/ft</b>	<b>9.7 W/ft</b>	<b>85 lm/W</b>
<b>Standard</b>	<b>414.5 lm/ft</b>	<b>5 W/ft</b>	<b>85 lm/W</b>

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	<b>LH</b>	<b>4000K</b>	<b>80+ CRI</b>
	<b>LS - 50%</b>	<b>3500K - 97%</b>	<b>90+ CRI - 80%</b>
		<b>3000K - 93%</b>	

MOUNTING OPTIONS

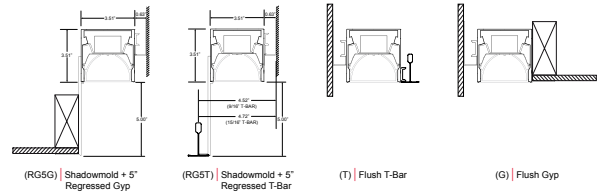

D9					
SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
D9	<b>M_</b> Exact Length* <b>PL_</b> "L" Shape** <b>PU_</b> "U" Shape** <b>PR_</b> Rectangle / Square** <b>CP_</b> Custom Pattern*** <small>*Specify in inches to then nearest 1/8 (i.e. M180.125)                      **Specify in inches to the nearest 1/8 (See Pattern Guide for details)                      ***Contact Design Assist</small>	<b>LS</b> LED Standard Output <b>LH</b> LED High Output <b>C_</b> LED Custom Output* <small>*Available from 25% to 125% of LED High Output</small>	<b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K	<b>U</b> Universal 120V - 277V <b>3</b> 347V	<b>HE</b> HE Tech™ <b>LV</b> Flat Blade Louvers* <small>*Satin Aluminum Standard</small>

MOUNTING	FINISH	DIMMING	EMERGENCY
<b>G</b> Flush Gyp <b>T</b> Flush T-Bar <b>RG3G</b> Shadowmold + 3" Regressed Gyp* <b>RG3T</b> Shadowmold + 3" Regressed T-Bar* <b>RG5G</b> Shadowmold + 5" Regressed Gyp* <b>RG5T</b> Shadowmold + 5" Regressed T-Bar* <small>*Optional finish</small>	<b>a</b> a·lightnium™ <b>W</b> Satin White <b>B</b> Satin Black <b>O_</b> Other* <small>*Specify RAL#</small>	<b>D</b> Standard 0-10 dimming* <b>D1</b> HiLume Ecosystems 1% (LDE1) <b>D3</b> Other Dimming** <small>*Dimming to 1% stated for standard 0-10v dimming                      **Specify model/series</small>	<b>EC</b> Emergency - circuited <b>E_</b> Emergency - battery* <small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures &lt; 4' length. Not available for 347V. See technical data for more information.</small>

OPTIONS
<b>M</b> Multi-Circuit* <b>R</b> Right Endcap Feed <b>L</b> Left Endcap Feed <b>N</b> New York City Code <b>Q</b> Wet Location** <b>CP</b> Chicago Plenum <b>CRI</b> 90+ CRI <small>*Submit multi-circuiting requirements                      **Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information.</small>