

ORDERING CODE

HOUSING  
**APX3**

LIGHTED MODULE  
**APX3**

**B**

PERFORMANCE AT 4000K

OUTPUT	OPTIC	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	55°	1,017 lm/ft	14 W/ft	72 lm/W
	22°	1,302 lm/ft	14 W/ft	92 lm/W
	HE	539 lm/ft	9.9 W/ft	54 lm/W
Standard	55°	508.5 lm/ft	7 W/ft	72 lm/W
	22°	651 lm/ft	7 W/ft	92 lm/W
	HE	269.5 lm/ft	5 W/ft	54 lm/W

Please consult factory for custom lumen output and wattage.

PROJECT INFO

DATE


TYPE

QUANTITY

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASILINE	LH	4000K	80+ CRI
		3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

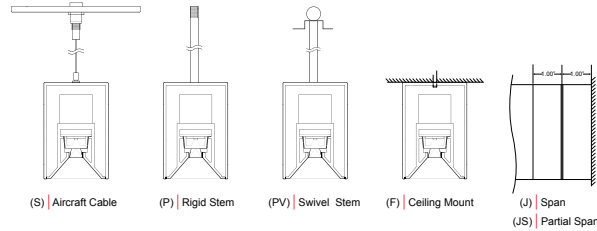

HOUSING

APX3	SERIES	LENGTH OR PATTERN TYPE	MOUNTING	FINISH	OPTIONS
APX3		_ M_ Nominal Length* _ P_ Exact Length** PL_ "L" Shape*** PU_ "U" Shape*** PR_ Rectangle / Square***	S Aircraft Cable* P Rigid Stem** PV Swivel Stem** F Ceiling / Surface Mount JS Partial Span J Full Span	T a-lightanium™ W Satin White B Satin Black O_ Other*	M Multi-Circuit* R Right Endcap Feed L Left Endcap Feed N New York City Code CRI 90+ CRI
		<small>*Specify to the nearest 6" lighted segment. Minimum length nominal 12".                      **Specify in inches to the nearest 1/16" Minimum length nominal 12".                      ***Specify to nearest 6", min. length 12" (See Pattern Guide for details)</small>	<small>*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a-lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified.                      **Indicate stem length to nearest inch. 1.00" minimum.</small>	<small>*Specify RAL#</small>	<small>*Submit multi-circuiting requirements</small>

LIGHTED MODULE (complete as many light module part numbers as required for housing specification)

APX3	SERIES	LENGTH OR CORNER	MODULE	CORNER DIRECTION	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
APX3		_ Nominal Length* 2' Nominal 2' 4' Nominal 4' 1x1 Corner* 2x2 Corner**	A Full light, no filler B Light at ends, filler in middle* C Filler at ends, light in middle* D Filler panel only, no light E Filler at ends + middle*	LD Direct LI Inside LO Outside	LH LED High Output LS LED Standard Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	55 Lens Baffle 55° 22 Lens Baffle 22° HE HE Tech™ - Filler (No Light)
		<small>*Filler panel only. Specify nominal length to nearest 6" increment                      **HE Optic only</small>	<small>*Not available on corners</small>	<small>*See module corner patterns</small>	<small>*Custom tuned output available in the range of 25% to 100% of LH, contact Design Assist</small>			

B	TRIM BAFFLE FINISH	DIMMING	EMERGENCY	SENSORS	ROW POSITION
B	Satin Black*	D Standard 0-10 dimming* D1 HiLume Ecosystems 1% (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery*	O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor	EOR End of row (1 endcap) MOR Middle of row (no endcaps)
	<small>*Filler panels to match finish</small>	<small>*Dimming to 1% standard 0-10v dimming                      **Specify model/series</small>	<small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures &lt; 4' length. Not available for 347V. See technical data for more information.</small>	<small>Filler panel required that will affect fixtures nominal length                      *Wattstopper FS-205 (Ø1")                      **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.</small>	