

ORDERING CODE

<b>APX5</b>	<b>B</b>
-------------	----------

PROJECT INFO

DATE


TYPE

QUANTITY

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
		3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

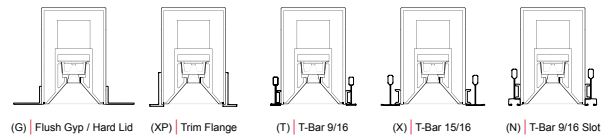

PERFORMANCE AT 4000K

OUTPUT	OPTIC	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	55°	1,017 lm/ft	14 W/ft	72 lm/W
	22°	1,302 lm/ft	14 W/ft	92 lm/W
	HE	539 lm/ft	9.9 W/ft	54 lm/W
Standard	55°	508.5 lm/ft	7 W/ft	72 lm/W
	22°	651 lm/ft	7 W/ft	92 lm/W
	HE	269.5 lm/ft	5 W/ft	54 lm/W

Please consult factory for custom lumen output and wattage.

APX5	SERIES	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
	APX5	_ Nominal Length* PL_ "L" Shape Flat** PLCW_ "L" Wall to Ceiling PLWW_ "L" Wall to Wall PU_ "U" Shape Flat** PUCW_ "U" Wall to Ceiling to Wall PUWW_ "U" Wall to Wall to Wall PR_ Rectangle / Square**	LH LED High Output LS LED Standard Output C_ LED Custom Output	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	55 Lens Baffle 55 Degree* 22 Lens Baffle 22 Degree* HE HE Tech™
		<small>*Specify increments of 6". Minimum length nominal 1'.                      **Specify to nearest 6" lighted segment (See Pattern Guide for details)</small>	<small>*Custom tuned output available in the range of 25% to 100% of LH, contact Design Assist</small>			<small>*Fully illuminated corners not available with baffle optic. 1'x1' filler panel provided.</small>

		<b>B</b>		
MOUNTING	FINISH	TRIM BAFFLE FINISH*	DIMMING	EMERGENCY
G Flush Gyp / Mud Over Flange XP 1/2" Trim Flange T T-Bar 9/16" X T-Bar 15/16" N T-Bar 9/16 Slot	T a*lightanium™ W Satin White B Satin Black O_ Other*	B Satin Black	D Standard 0-10 dimming* D1 Lutron Eco H series (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery*
	<small>*Specify RAL#</small>	<small>*Blank panels to match finish</small>	<small>*Dimming to 1% stated for standard 0-10v dimming                      **Specify model/series</small>	<small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures &lt; 4' length. Not available for 347V. See technical data for more information.</small>

SENSORS	OPTIONS
O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor	M Multi-Circuit* R Right Endcap Feed L Left Endcap Feed N New York City Code CP Chicago Plenum CRI 90+ CRI
<small>Filler panel required that will affect fixtures nominal length                      *Wattstopper FS-205 (Ø1")                      **Wattstopper FD-301 wired for daylight harvesting.                      Requires 0-10v dimming.</small>	<small>*Submit multi-circuiting requirements</small>