



ORDERING CODE

<b>ATL3</b>	<b>LH</b>	<b>U</b>
	<b>D</b>	

PROJECT INFO

TYPE

DATE

QUANTITY

LIGHT LOSS FACTORS


	LED CCT	CRI
BASILINE	<b>4000K</b>	<b>80+ CRI</b>
	<b>3500K - 97%</b>	<b>90+ CRI - 80%</b>
	<b>3000K - 93%</b>	

PERFORMANCE AT 4000K

OUTPUT	DIAMETER	LUMEN OUTPUT	INPUT WATTS	EFFICACY
<b>High</b>	20"	2,665 lm	38.3 W	70 lm/W
	32"	6,559 lm	80 W	82 lm/W
	48"	15,795 lm	183 W	86 lm/W
<b>Standard</b>	20"	2,025 lm	27.7 W	73 lm/W
	32"	5,241 lm	60.6 W	86 lm/W
	48"	11,520 lm	122.6 W	94 lm/W

Please consult factory for custom lumen output and wattage.

MOUNTING OPTIONS

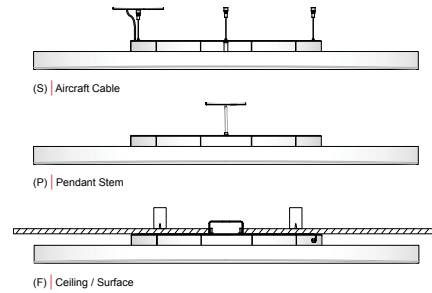

IF ALL PRODUCT NOMENCLATURE IS LISTED WITH A QS, THIS PRODUCT IS AVAILABLE IN OUR QUICK-SHIP PROGRAM

ATL3		LH		U	
SERIES	DIAMETER	OUTPUT	LED CCT	VOLTAGE	MOUNTING
ATL3	20 20" QS 32 32" QS 48 48"	LH LED High Output QS LS LED Standard Output C_ LED Custom Output*	30 3000K 35 3500K QS 40 4000K	U Universal 120V - 277V QS	S Aircraft Cable* QS F Ceiling / Surface Mount P_ Rigid Stem** PV_ Swivel Stem**
		*Contact Design Assist for custom tuning			*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a-lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified. **Indicate stem length to nearest inch. 1.00" minimum.

	D	
FINISH	DIMMING	EMERGENCY
T a-lightanium™ W Satin White QS B Satin Black O_ Other*	D Standard 0-10 dimming* QS	E1 Emergency - battery*
*Specify RAL#	*Dimming to 5% stated for standard 0-10v dimming **Specify model/series	*20" and 48" IOTA-ILB-CP12-B (12W unit, integral) 32" IOTA-ILB-CP05-B (5W unit, integral). Specify desired quantity of batteries. Not available for 347V. 20" remotely mounted in RME1 enclosure.