

ORDERING CODE

ATL3	LH	U
	D	

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	DIAMETER	FINISH	LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	20"	a•lightanium	3,489 lm	40.7 W	86 lm/W
		Satin Black	3,465 lm	40.7 W	85 lm/W
		Satin White	4,120 lm	40.7 W	101 lm/W
	32"	a•lightanium	10,542 lm	103.3 W	102 lm/W
		Satin Black	9,770 lm	103.3 W	95 lm/W
		Satin White	11,425 lm	103.3 W	111 lm/W
	48"	a•lightanium	23,722 lm	207.5 W	114 lm/W
		Satin Black	23,632 lm	207.5 W	114 lm/W
		Satin White	24,217 lm	207.5 W	117 lm/W

Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

BASELINE	OUTPUT	LED CCT	CRI
	LH	4000K	80+ CRI
		3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

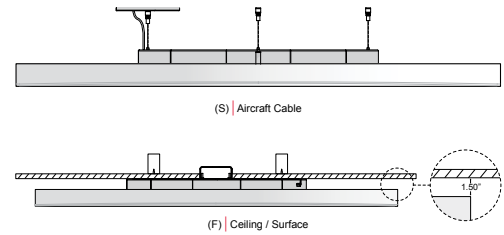

ATL3		LH		U	
SERIES	DIAMETER	OUTPUT	LED CCT	VOLTAGE	MOUNTING
ATL3	20 20" 32 32" 48 48"	LH LED High Output	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V	S Aircraft Cable F Ceiling / Surface Mount

	D	
FINISH	DIMMING	EMERGENCY
T a•lightanium™ W Satin White B Satin Black	D Standard 0-10 dimming*	E1 Emergency - battery*
	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*(1) ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V.