

ORDERING CODE

ATL3	LH	U
	D	

PROJECT INFO

TYPE

DATE

QUANTITY


LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
		3500K - 97%	90+ CRI - 80%
		3000K - 93%	

PERFORMANCE AT 4000K

	DIAMETER	LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	20"	2,665 lm	38.3 W	70 lm/W
	32"	6,559 lm	80 W	82 lm/W
	48"	15,795 lm	183 W	86 lm/W

MOUNTING OPTIONS

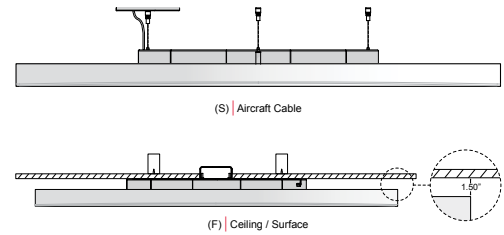

ATL3		LH		U	
SERIES	DIAMETER	OUTPUT	LED CCT	VOLTAGE	MOUNTING
ATL3	20 20" 32 32" 48 48"	LH LED High Output	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V	S Aircraft Cable F Ceiling / Surface Mount P_ Rigid Stem*
*Indicate stem length: 1.00" - 36.00"					

	D	
FINISH	DIMMING	EMERGENCY
T a·lightanium™ W Satin White B Satin Black O_ Other*	D Standard 0-10 dimming*	E1 Emergency - battery*
*Specify RAL#	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*(1) ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V.