

ORDERING CODE

| | | | |
|-------------|-----------|-----------|----------|
| ATL6 | 20 | LH | U |
| W | D | | |

PROJECT INFO

DATE

TYPE

QUANTITY

PERFORMANCE AT 4000K


| OUTPUT | DIAMETER | LUMEN OUTPUT | INPUT WATTS | EFFICACY |
|----------|----------|--------------|-------------|----------|
| High | 20" | 2,665 lm | 38.3 W | 70 lm/W |
| Standard | 20" | 2,025 lm | 27.7 W | 73 lm/W |

Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

| | LED CCT | CRI |
|----------|-------------|---------------|
| BASELINE | 4000K | 80+ CRI |
| | 3500K - 97% | 90+ CRI - 80% |
| | 3000K - 93% | |

MOUNTING OPTIONS

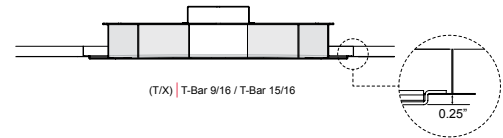

| ATL6 | 20 | LH | | U | |
|--|----------|---|---|--------------------------------|---|
| SERIES | DIAMETER | OUTPUT | LED CCT | VOLTAGE | MOUNTING |
| ATL6 | 20 20" | LH LED High Output LS LED Standard Output C_ LED Custom Output | 30 3000K 35 3500K 40 4000K | U Universal 120V - 277V | T T-Bar 9/16" X T-Bar 15/16" |
| *Contact Design Assist for custom tuning | | | | | |

| W | D | |
|-------------------------|--|---|
| FINISH | DIMMING | EMERGENCY |
| W Textured White | D Standard 0-10 dimming* | E1 Emergency - battery* |
| | *Dimming to 1% stated for standard 0-10v dimming **Specify model/series | *(1) ILB-CP05-B (12W or 5W for 90min). Specify desired quantity of batteries. Not available for 347V. |