

ORDERING CODE

APX6	1	LH	S
	W	B	

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	OPTIC	NOMINAL LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	55°	1,017 lm/ft	14 W/ft	72 lm/W
	22°	1,302 lm/ft	14 W/ft	92 lm/W
	HE	539 lm/ft	9.9 W/ft	54 lm/W

Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
		3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

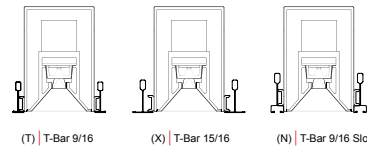

APX6	1	LH			S	
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	DIRECT DISTRIBUTION	DIRECT OPTICS
APX6	1 Nominal 1' Lighted Section, 2x2 Panel	LH LED High Output	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	S Symmetric	55 Lens Baffle 55 Degree 22 Lens Baffle 22 Degree HE HE Tech™ - Filler (no light)

	W	B			
MOUNTING	FINISH	TRIM BAFFLE FINISH	DIMMING	EMERGENCY	OPTIONS
T T-Bar 9/16" X T-Bar 15/16" N T-Bar 9/16" slot	W Textured White	B Satin Black	D Standard 0-10 Dimming *Dimming to 1% stated for standard 0-10v dimming **Specify model/series	E1 Emergency - battery* *(1) ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V.	N New York City Code