

ORDERING CODE

<b>ATL2</b>	<b>D</b>	<b>U</b>
-------------	----------	----------

PROJECT INFO

TYPE

DATE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	DIAMETER	INDIRECT - SUSPENDED			INDIRECT - SURFACE			DIRECT		
		LUMEN OUTPUT	INPUT WATTS	EFFICACY	LUMEN OUTPUT	INPUT WATTS	EFFICACY	LUMEN OUTPUT	INPUT WATTS	EFFICACY
High	20"	2,422 lm	19.4 W	125 lm/W	1,917 lm	17.5 W	132 lm/W	2,665 lm	38.3 W	70 lm/W
	32"	3,632 lm	29.2 W	125 lm/W	3,100 lm	26.2 W	132 lm/W	6,559 lm	80 W	82 lm/W
	48"	4,843 lm	38.9 W	125 lm/W	5,600 lm	42.9 W	132 lm/W	15,795 lm	183 W	86 lm/W
Standard	20"	1,253 lm	9.9 W	127 lm/W	1,326 lm	9.4 W	142 lm/W	2,025 lm	27.7 W	73 lm/W
	32"	1,879 lm	14.8 W	127 lm/W	2,305 lm	13.5 W	142 lm/W	5,241 lm	60.6 W	86 lm/W
	48"	2,506 lm	19.7 W	127 lm/W	3,458 lm	22 W	142 lm/W	11,520 lm	122.6 W	94 lm/W

Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	LED CCT	CRI
BASELINE	4000K	80+ CRI
	3500K - 97%	90+ CRI - 80%
	3000K - 93%	

MOUNTING OPTIONS

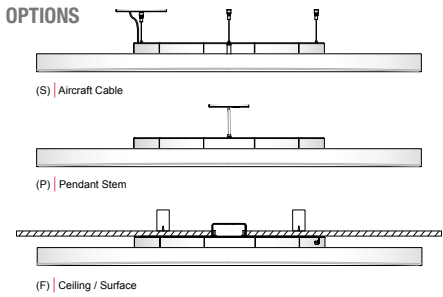

ATL2				U	
SERIES	DIAMETER	OUTPUT	LED CCT	VOLTAGE	MOUNTING
ATL2	20 20" 32 32" 48 48"	ILS Indirect LED Standard Output ILH Indirect LED High Output IC Indirect LED Custom Output* + DLS Direct LED Standard Output DLH Direct LED High Output DC Direct LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V	S Aircraft Cable* F Ceiling / Surface Mount P_ Rigid Stem** PV_ Swivel Stem** <small>*Black power cord provided for satin black and a-lightanium™ finish, unless otherwise specified. White power cord provided for satin white finish, unless otherwise specified. **Indicate stem length: 1.00" - 36.00". Only available for 32" and 48". 20" available with remote driver. Use of swivel stem highly recommended.</small>

		D	
FINISH	CIRCUITING	DIMMING	EMERGENCY
T a-lightanium™ W Satin White B Satin Black O_ Other*	1 Single Circuit 2 Multi-Circuit*	D Standard 0-10 dimming*	E1 Emergency - battery*
<small>*Specify RAL#</small>	<small>*Separate uplight and downlight circuits</small>	<small>*Dimming to 1% stated for standard 0-10v dimming **Specify model/series</small>	<small>*(1) ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures &lt; 4" length. Not available for 347V.</small>