

ORDERING CODE

C4 + **D**

PROJECT INFO

DATE

TYPE

QUANTITY


PERFORMANCE AT 4000K

OUTPUT	DISTRIBUTION	NOMINAL LUMEN OUTPUT		INPUT WATTS	EFFICACY
		INDIRECT	DIRECT		
High	Symmetric Wide	673 lm/ft	N/A	9 W/ft	75 lm/W
	Symmetric	N/A	921 lm/ft	9.7 W/ft	95 lm/W
	Asymmetric	N/A	413 lm/ft	9.6 W/ft	43 lm/W
	Symmetric Narrow	912 lm/ft	N/A	9.6 W/ft	95 lm/W
	Asymmetric	670 lm/ft	N/A	9.6 W/ft	70 lm/W
Standard	Symmetric Wide	352.5 lm/ft	N/A	5 W/ft	74 lm/W
	Symmetric	N/A	460.5 lm/ft	5 W/ft	95 lm/W
	Asymmetric	N/A	206.5 lm/ft	5 W/ft	43 lm/W
	Symmetric Narrow	456 lm/ft	N/A	5 W/ft	95 lm/W
	Asymmetric	335 lm/ft	N/A	5 W/ft	70 lm/W

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

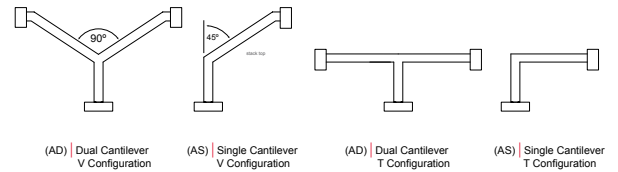

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

C4			+			
SERIES	LENGTH		OUTPUT	LED CCT	VOLTAGE	INDIRECT DISTRIBUTION
C4	M_ Nominal Length* M_ Exact Length**		ILS Indirect LED Standard Output ILH Indirect LED High Output IC_ Indirect LED Custom Output* + DLS Direct LED Standard Output DLH Direct LED High Output DC_ Direct LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	M Symmetric Wide* G Symmetric Narrow N Asymmetric
*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125)		*Available from 25% to 125% of LED High Output				*Not recommended for wall mount

D				
INDIRECT OPTICS	DIRECT OPTICS	MOUNTING	ARM / POST STYLE	FINISH
D Rigid Diffuse Dust Cover	HE HE Tech™ TF Tri-Formed Self-Shielding Lens	AS_ Single Cantilever AD_ Dual Cantilever	T T Configuration V V Configuration	T a·lightanium™ W Satin White B Satin Black O_ Other*
		*Specify length of cantilever in inches to the nearest 1/8"	Submit angle. Specify to the nearest 5°	*Specify RAL#

CIRCUITING	DIMMING	EMERGENCY	OPTIONS
1 Single Circuit 2 Multi-Circuit* M Other Multi-Circuit**	D Standard 0-10 dimming* D1 Lutron Eco H series (LDE1) D3 Other Dimming**	EC Emergency - circuited E_ Emergency - battery*	M Multi-Circuit* N New York City Code
*Separate uplight and downlight circuits **Submit multi-circuiting requirements	*Dimming to 1% stated for standard 0-10v dimming **Specify model/series	*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.	*Submit multi-circuiting requirements