

ORDERING CODE

<b>A6</b>	<b>A</b>
-----------	----------

PROJECT INFO

DATE

TYPE

QUANTITY

PERFORMANCE AT 4000K


OUTPUT	DISTRIBUTION	NOMINAL LUMEN OUTPUT		INPUT WATTS	EFFICACY
		INDIRECT	DIRECT		
High	90/10 Symmetric	1,814 lm/ft	201 lm/ft	19 W/ft	106 lm/W
	75% Symmetric	177 lm/ft	530 lm/ft	9.5 W/ft	74 lm/W
	100% Symmetric	N/A	602 lm/ft	9.5 W/ft	63 lm/W
Standard	90/10 Symmetric	906.5 lm/ft	100.5 lm/ft	9.5 W/ft	107 lm/W
	75% Symmetric	88.5 lm/ft	265 lm/ft	4.8 W/ft	64 lm/W
	100% Symmetric	N/A	301 lm/ft	4.75 W/ft	75 lm/W

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage.

LIGHT LOSS FACTORS

	OUTPUT	LED CCT	CRI
BASELINE	LH	4000K	80+ CRI
	LS - 50%	3500K - 97%	90+ CRI - 80%
		3000K - 93%	

MOUNTING OPTIONS

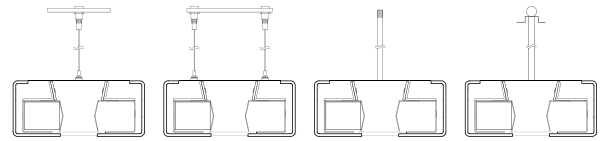

A6					A	
SERIES	LENGTH	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS	DISTRIBUTION
A6	_ Nominal Length* M_ Exact Length**	LS LED Standard Output LH LED High Output C_ LED Custom Output*	30 3000K 35 3500K 40 4000K	U Universal 120V - 277V 3 347V	A a•cirrus™	O Indirect 90/10* (open, no lens) E 75% Downlight** H 100% Downlight**
<small>*Specify in feet to the nearest foot (i.e. 12)                      **Specify in inches to the nearest 1/8 (i.e. M180.125)</small>		<small>*Available from 25% to 125% of LED High Output</small>				<small>*(LS-10 W/ft LH-20 W/ft)                      **(LS-5 W/ft LH-10 W/ft)</small>

MOUNTING	FINISH	CIRCUITING	DIMMING	EMERGENCY
S Single Aircraft Cable* D Dual Aircraft Cable* P_ Pendant Stem** PV_ Swivel Stem**	T a•lightanium™ W Satin White B Satin Black O_ Other*	1 Single Circuit 2 Multi-Circuit*	D Standard 0-10 dimming* D1 Lutron Eco H series (LDE1) D3_ Other Dimming** <small>Specify model/series</small>	EC Emergency - circuited E_ Emergency - battery*
<small>*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a•lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified.                      **Indicate stem length to nearest inch. 1.00" minimum.</small>	<small>*Specify RAL#</small>	<small>*Submit multi-circuiting requirements</small>	<small>*Dimming to 1% stated for standard 0-10v dimming                      **Specify model/series</small>	<small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures &lt; 4' length. Not available for 347V. See technical data for more information.</small>

SENSORS	OPTIONS
O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor	N New York City Code CRI 90+ CRI
<small>**Wattstopper FS-205 (Ø1")                      ***Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.</small>	