

ORDERING CODE

D3

PROJECT INFO

TYPE

DATE

QUANTITY


BASELINE PERFORMANCE (80 CRI - 4000K)

OUTPUT	DISTRIBUTION	NOM. LUMEN OUTPUT	INPUT WATTS	EFFICACY
High (LH)	HE Tech™	762 lm/ft	9.5 W/ft	80 lm/W
	WISP	754 lm/ft	9.5 W/ft	79 lm/W
	Drop Lens	692 lm/ft	9.5 W/ft	73 lm/W
	Flat Blade Louvers*	527 lm/ft	9.5 W/ft	55 lm/W
Standard (LS)	HE Tech™	408 lm/ft	4.5 W/ft	90 lm/W
	WISP	403 lm/ft	4.5 W/ft	89 lm/W
	Drop Lens	370 lm/ft	4.5 W/ft	82 lm/W
	Flat Blade Louvers*	282 lm/ft	4.5 W/ft	62 lm/W

LIGHT LOSS FACTORS

CRI	LED CCT	FACTOR
80+ CRI	4000K	BASELINE
80+ CRI	3500K	99%
80+ CRI	3000K	95%
90+ CRI	4000K	83%
90+ CRI	3500K	83%
90+ CRI	3000K	84%

MOUNTING OPTIONS

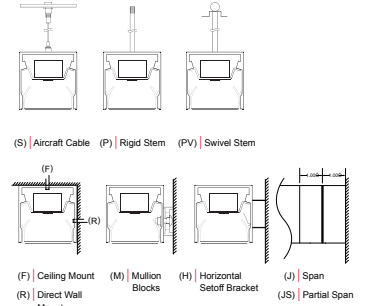

Custom tuned output available from 25% to 125% of high output. Please consult factory for custom lumen output and wattage. *Flat Blade Louver calculated using the satin aluminum finish.

IF ALL PRODUCT NOMENCLATURE IS LISTED WITH A QS, THIS PRODUCT IS AVAILABLE IN OUR QUICK-SHIP PROGRAM

D3	LENGTH OR PATTERN TYPE	OUTPUT	LED CCT	VOLTAGE	DIRECT OPTICS
D3	Nominal Length* QS Exact Length** PL_ "L" Shape*** QS PU_ "U" Shape*** PR_ Rectangle / Square*** CP Custom Pattern**** <small>*Specify in feet to the nearest foot (i.e. 12) **Specify in inches to then nearest 1/8 (i.e. M180.125) ***Specify in inches to the nearest 1/8 (See Pattern Guide for configurations) ****Contact Design Assist</small>	LS LED Standard Output QS LH LED High Output QS C_ LED Custom Output*	30 3000K QS 35 3500K QS 40 4000K QS	U Universal 120V - 277V QS 3 347V	HE HE Tech™ QS KS Awash Kicker + WISP DL 1" Drop Lens LV Flat Blade Louvers*

MOUNTING	FINISH	DIMMING	EMERGENCY	SENSORS
S Aircraft Cable* QS P Rigid Stem** PV Swivel Stem** R Direct Wall Mount M Mullion Blocks*** H Horizontal Setoff Bracket*** JS Partial Span J Full Span F Ceiling / Surface Mount QS <small>*Standard 48" field adjustable cable, specify length to nearest inch if over 48". Black power cord provided for satin black and a-lightanium finish and white power cord provided for all other fixture finishes, unless otherwise specified. **Indicate stem length to nearest inch, 1.00" minimum. ***Enter "1" for 1" depth, Enter "5" for 1/2" depth</small>	T a-lightanium™ QS W Satin White QS B Satin Black O_ Other* <small>*Specify RAL#</small>	D Standard 0-10 dimming* QS D1 Lutron Eco H series (LDE1) D3 Other Dimming** <small>*Dimming to 1% stated for standard 0-10v dimming **Specify model/series</small>	EC Emergency - circuited E_ Emergency - battery* QS <small>*Factory-installed emergency battery pack: ILB-SL-CP12 (1200lm for 90min). Specify desired quantity of batteries. Not available on fixtures < 4' length. Not available for 347V. See technical data for more information.</small>	O Occupancy Sensor* P Photocell / Daylight Sensor** OP Occupancy & Daylight Sensor <small>*Wattstopper FS-205 (Ø1") **Wattstopper FD-301 wired for daylight harvesting. Requires 0-10v dimming.</small>

OPTIONS	
MRL_ 2" LED Downlight Module*	K Natatorium Application***
M Multi-Circuit**	Q Wet Location****
R Right Endcap Feed	CRI 90+
L Left Endcap Feed	MRI MRI
N New York City Code	

*Specify required quantity, see LED Module Addendum for additional ordering details.
 **Submit multi-circuiting requirements.
 ***Not available with aircraft cable. See guide and contact Design Assist. Not compatible with Drop Lens or Flat Blade Louvers Optics.
 ****Not available with aircraft cable. Wet location suitable in full coverage and/or mullion mounted applications (direct to sky not recommended); not suitable for extreme weather applications. Refer to Wet Location brochure and contact Design Assist for more information. Not compatible with Drop Lens or Flat Blade Louvers Optics.